


ifi ZEN STREAM

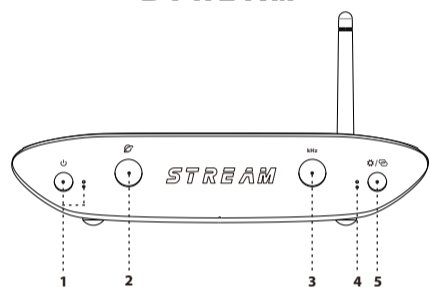

Thank you for purchasing the Stream from ZEN series. The Stream is a Wi-Fi Audio Transport.

1. Power switch and indicator (⏻)

2. Network Status LED (📶)

The LED color scheme indicates the signal strength and network status received by ZEN Stream from the router.

Internet	LED	Speed
	White	Fast
	Cyan	Slow
Local network (no Internet)	Green	Fast
	Yellow	Slow
No connection	Red	-

Tip: For all the various network connection methods, please visit our website.

3. Audio Format LED (kHz)

The LED colour scheme indicates the audio format and sampling frequency received by ZEN Stream from the music source.

LED	Mode
Yellow	PCM 44.1/48kHz
White	PCM 88.2/96/176.4/192/352.8/384kHz
Cyan	DSD 64/128
Red	DSD 256
Green	MQA
Blue	MQA Studio
Magenta	MQA Rendering


4. LED for Hotspot Status

LED	Status
Flashing	On and awaiting connection
ON	Hotspot Connected
OFF	Hotspot off

**60 seconds auto OFF if no activation.*

5. LED/HOTSPOT switch (🔌/📶)

- LED ON/OFF (short press)
- Hotspot ON/OFF (long press)

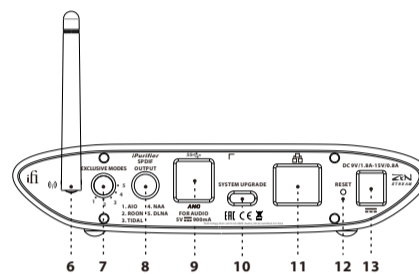

6. Antenna

Please attach the enclosed antenna for maximum reception quality.

7. System (Mode) selector

The following 5 play modes can be selected:

- 1) All-In-One (required for web portal access)
- 2) Roon only
- 3) TIDAL only
- 4) NAA (Network Audio Adapter) only
- 5) DLNA only

8. SPDIF (Coaxial) output

This is a coaxial output with iPurifier technology built-in.

9. USB Type A x 2

Compatible with USB 2.0 and USB 3.0.

- a) Output - Connect to Dac
- b) Input - Connect to HDD, USB DISK etc

These two USB ports have ANC technology built-in.

10. System update port

Used for system firmware update when online update is not possible.

11. Ethernet

For an ethernet connection directly from a router.

12. Factory Reset

Long press for 15 seconds with a paper clip and WAIT for ~5mins
DO NOT POWER OFF!

***Loss of power during this period may damage your device and leave it unusable.*

13. DC power supply connection

DC 9V/1.8A-15V/0.8A DC power input. Please connect ZEN Stream to the enclosed power supply.

Specifications

Power supply requirement: DC 9V/1.8A-15V/0.8A (centre +ve)

Input: Wi-Fi / Ethernet / USB DISK, HDD etc.

Formats: PCM ≤ 384kHz, DSD ≤ 256, MQA

Output: USB3.0/Type-A Socket x2 and S-PDIF (Coaxial)

Power consumption: No Signal ~6W
Max Signal ~10W

Dimensions: 158 x 100 x 35 mm (6.2" x 3.9" x 1.4")

Net weight: 578 g (1.27 lbs)

Limited Warranty: 12 months*

**12 months typical or as permitted/required by local reseller laws.*

***Specifications are subject to change without notice.*