

# KEF PRICE LIST

September 2025 Edition

BENELUX





### **KEF is a proud pioneer of excellence in sound**

Since 1961, KEF has been obsessed with the power of high-fidelity; with its ability to shape and enhance the lives of listeners, and to transform the experience of sound from the ordinary to the visceral.

With innovation at our core and passion in our hearts, we are committed to engineering exceptional products and transformative experiences that bring meaning, magic, and moments into every home.

We continue to follow our founding vision to be the best at what we do, and to create a world in which listeners and creators can be inspired and supported to listen with intent and to believe with confidence.

*'Of all art, music is the most indefinable and the most expressive, the most insubstantial and the most immediate, the most transitory and the most imperishable. Transformed to a dance of electrons along a wire, its ghost lives on. When KEF returns music to its rightful habitation, your ears and mind, they aim to do so in the most natural way they can... without drama, without exaggeration, without artifice.'*

Raymond Cooke

*KEF founder*

# Index

4	Listen and believe	
5	KEF Technologies KEF	
6	HiFi Speakers & Accessories	
8		Muon
10		Blade Meta
12		The Reference Meta
16		R Series Meta
20		Q Series Meta
24		LS50 Meta
26	Soundbars	
29		XIO
30	Wireless HiFi Speakers & Accessories	
35		LS60 Wireless
35		LS50 Wireless II
36		LSX II, LSX II LT
38		MUO

<b>41</b>	<b>Headphones &amp; Accessories</b>	
<b>43</b>		Mu7
<b>43</b>		Mu3
<b>47</b>	<b>Subwoofers &amp; Accessories</b>	
<b>47</b>		Reference 8b
<b>49</b>		KC92
<b>49</b>		KC62
<b>50</b>		Kube 15 MIE
<b>50</b>		Kube 12 MIE
<b>50</b>		Kube 10 MIE
<b>51</b>		Kube 8 MIE
<b>52</b>	<b>Architectural Speakers &amp; Accessories</b>	
<b>55</b>		Extreme Home Theatre
<b>56</b>		Encastrables au plafond
		Encastrables au mur
<b>62</b>		Applications spéciales
<b>65</b>		Caisson de basses
<b>67</b>		Enceintes d'extérieur

# Listen and believe

KEF's mission is to deliver sound with as little intervention as possible; from treble to bass, and everything in between.

We believe that the best sound is natural sound. Combining our obsessions with acoustic authenticity and innovative engineering, our products speak for themselves.



# KEF Technologies

A list of breakthroughs spanning more than half a century shores up that promise; a walk to match the talk. Patents and academic papers alike testify to decades of consistent progress, from the early use of synthetic materials to our Reference Series which determines industry standards to this day. KEF's insistence on excellence is at the heart of a virtuous circle, which attracts the world's most gifted acoustic engineers to join us in the pursuit of good, better, best.



## Uni-Q® Technology

Of the many landmark innovations KEF has pioneered, arguably the greatest of all is the Uni-Q® driver array. Uni-Q® acts as a single point source to disperse sound more evenly, delivering a more coherent, hyper-realistic sound experience.



## Metamaterial Absorption Technology (MAT™)

Metamaterial Absorption Technology (MAT™) is a highly complex maze-like structure that absorbs 99% of the unwanted sound from the rear of the driver, eliminating the resulting distortion and providing purer, more natural sound.



## Single Apparent Source Technology

A unique technology that aims to achieve the acoustic ideal of a point source, where low, mid and high frequencies radiate from one point. The result is noticeably more precise imaging and highly accurate sound across a wider area.



## Uni-Core™ Technology

Uni-Core™ technology redefines the physical space high-performance speakers and subwoofers required to deliver deep and accurate bass. Through exceptional engineering and creativity, KEF's engineers have revolutionised the traditional force cancelling arrangement with a Uni-Core™ design that delivers deeper bass from ultra-compact cabinets.



## Music Integrity Engine® (MIE)

Music Integrity Engine is a collection of bespoke Digital Signal Processing algorithms that is optimised for the Uni-Q driver, enabling it to deliver a perfectly timed performance, for better imaging and a tighter sound.

# HiFi Speakers & Accessories





# Muon

Sound by KEF.  
Design by Ross Lovegrove.



The ultimate loudspeaker with state-of-the-art acoustic technology with the sensual, organic forms of the visionary industrial designer Ross Lovegrove. Muon is limited to an edition of 100 pairs.

Key Features	<ul style="list-style-type: none"><li>■ Each Muon is individually crafted and comes with a certificate of its unique frequency response curve</li><li>■ Feature Uni-Q driver array to deliver seamless imaging throughout the room</li><li>■ Acoustic Compliance Enhancement (ACE) technology to double the available volume through adsorption</li><li>■ Constructed from 6mm, super-formed aluminium to provide a totally rigid structure that minimises sound-distorting vibrations</li></ul>
Key Technologies	<ul style="list-style-type: none"><li>■ Uni-Q®</li><li>■ Acoustic Compliance Enhancement (ACE)</li></ul>

## Muon

A triumph of form marrying function, Muon is perhaps the most extraordinary loudspeaker ever conceived.



MSRP 220.000€/pair	
PRODUCT SPECIFICATION	
Design	Four-way closed box floorstanding loudspeaker ACE enclosure
Drive units	6 x 250 mm (10 in.) LF 1 x 250 mm (10 in.) LMF Uni-Q driver array MF 1 x 125 mm (5 in.) Li-Mg-Al/LCP hybrid cone HF 1 x 25 mm (1 in.) vented aluminium dome, featuring KEF's unique 'Tangerine Waveguide'
Frequency response	4 Ω (min. 3.2 Ω)
Amplifier requirements	100 to 400 W (typical)
Sensitivity	90 dB (2.83V/1m)
Maximum output	118 dB
Impedance	4 Ω (min. 3.2Ω)
Dimensions	H2000 x W600 x D380 mm (78.7 x 23.6 x 15 in.)/piece
Product weight	115 kg/ piece
LOGISTIC SPECIFICATION	
Packaging dimensions	H2160 x W850 x D700 mm (85 x 33.5 x 27.6 in.)/piece
Gross weight	180 kg (396.9 lbs.)/piece
Warranty period	5 years
Finishes	Polished Aluminium
Item no.	SP3582AA
UPC	637203027727



# Blade

A sound statement.

An icon that engages every sense.



A bold and striking presence, Blade pushes the boundaries of what is possible with sound. The world's first Single Apparent Source loudspeaker now with Metamaterial Absorption Technology (MAT™).

## Key Features

- Single Apparent Source technology revolutionises the orientation of the low, mid, and high frequency drivers to deliver sound you hear to be more real and immersive
- Metamaterial Absorption Technology eliminates 99% of high-frequency distortion for pure, natural sound
- Bespoke 12<sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy
- Two pairs of force-cancelling LF drivers deliver clean, massively extended bass
- Enhanced crossover design with fine-tuned signal paths for maximum clarity
- Optimised cabinet design for best acoustic performance
- Customised finishes are available upon request

## Key Technologies

- Uni-Q®
- MAT™
- Single Apparent Source Technology

## Blade One Meta

Blade One Meta is the top model of Blade, the pinnacle of KEF engineering.



MSRP  
**36.750€/pair**

### PRODUCT SPECIFICATION

Design	Three-way bass reflex Single apparent source
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 225 mm (9 in.) aluminium cone, force cancelling
Frequency response	35 Hz - 35 kHz
Amplifier requirements	50 - 400 W
Sensitivity	88 dB
Maximum output	117 dB
Impedance	4 Ω (min. 2.8 Ω)
Dimensions	H1590 x W363 x D540 mm (62.5 x 14.3 x 21.2 in.)/piece
Product weight	57.2 kg (126 lbs.)/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H1680 x W454 x D704 mm (66.1 x 17.8 x 27.7 in.)/piece		
Gross weight	681 kg (1501 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Piano Black/Grey	b. Piano Black/Copper	c. Frosted Blue/Blue
Item no.	SP4044BA	SP4044ZA01	SP4044CA
UPC	637203048371	637203048418	637203048388
Finishes	d. Frosted Blue/Bronze	e. Charcoal Grey/Red	f. Charcoal Grey/Bronze
Item no.	SP4044ZA03	SP4044ZA02	SP4044HA
UPC	637203048432	637203048425	637203048395
Finishes	g. Racing Red/Grey	h. Arctic White/Champagne	
Item no.	SP4044KA	SP4044AA	
UPC	637203048401	637203048364	

## Blade Two Meta


Blade Two Meta shares the same Blade DNA in a smaller footprint.



MSRP  
**27,300€/pair**

### PRODUCT SPECIFICATION

Design	Three-way bass reflex Single apparent source
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 165 mm (6.5 in.) aluminium cone, force cancelling
Frequency response	33 Hz - 35 kHz
Amplifier requirements	50 - 400 W
Sensitivity	86 dB
Maximum output	116 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H1461 x W338 x D475 mm (57.5 x 13.3 x 18.7 in.)/piece
Product weight	35.5 kg (77.8 lbs.)/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H1566 x W454 x D622 mm (61.7 x 17.9 x 24.5 in.)/piece		
Gross weight	44.6 kg (98.3 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Piano Black/Grey	b. Piano Black/ Copper	c. Frosted Blue/Blue
Item no.	SP4045BA	SP4045ZA01	SP4045CA
UPC	637203048456	637203048494	637203048463
Finishes	d. Frosted Blue/Bronze	e. Charcoal Grey/Red	f. Charcoal Grey/Bronze
Item no.	SP4044ZA03	SP4045ZA02	SP4045HA
UPC	637203048517	637203048500	637203048470
Finishes	g. Racing Red/Grey	h. Arctic White/Champagne	
Item no.	SP4045KA	SP4045AA	
UPC	637203048487	637203048449	





# The Reference

Detail remastered.  
An icon redefined for tomorrow.




The essential for any audiophile. Hand built by the masters who set the standard for audio quality, THE REFERENCE has been the benchmark for loudspeakers and sound reproduction. The Reference is an embodiment of KEF's philosophy and the relentless pursuit of perfection. Now with Metamaterial Absorption Technology (MAT™).

Key Features	■ Metamaterial Absorption Technology eliminates 99% of high-frequency distortion for pure, natural sound
	■ Bespoke 12 <sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy
	■ Enhanced crossover design with fine-tuned signal paths for maximum clarity
	■ Optimised cabinet design for best acoustic performance
	■ With mounting inserts to secure on KEF S-RF1 Floor Stand (available as separate item)
	■ The Reference Series Grille set for each model is available as separate item
Key Technologies	■ Uni-Q®
	■ MAT™

## Reference 5 Meta


The flagship model that all other high-performance loudspeakers compare themselves against.





MSRP


22.000€/pair


PRODUCT SPECIFICATION			
Design	Three-way bass reflex		
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 165 mm (6.5 in.) aluminium cone		
Frequency response	40 Hz – 35 kHz (±3 dB)		
Amplifier requirements	50 - 400 W		
Sensitivity	88 dB		
Maximum output	116 dB		
Impedance	4Ω (min.3.2Ω)		
Dimensions	H1350 x W205 x H462 mm (53.1 x 8.1 x 18.2 in.)/piece		
Product weight	60.2 kg (132.7 lbs.)/piece		











LOGISTIC SPECIFICATION			
Packaging dimensions	H1555 x W598 x D354 mm (61.2 x 23.5 x 13.9 in.)/piece		
Gross weight	63.9 kg (140.9 lbs.)/piece		
Warranty period	5 years		
Finishes	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
Item no.	SP4050AA	SP4050CA	SP4050BA
UPC	637203048685	637203048708	637203048692
Finishes	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
Item no.	SP4050EA	SP4050WA	
UPC	637203048715	637203048722	

## Reference 3 Meta

The floorstanding model that is capable of delivering a sensational sound stage.

		MSRP <b>15.000€/pair</b>	
<b>PRODUCT SPECIFICATION</b>			
Design	Three-way bass reflex		
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) aluminium cone		
Frequency response	43 Hz – 35 kHz (±3 dB)		
Amplifier requirements	50 - 300 W		
Sensitivity	86 dB		
Maximum output	113.5 dB		
Impedance	4 Ω (min. 3.2 Ω)		
Dimensions	H1155 x W205 x D462 mm (45.5 x 8.1 x 18.2 in.)/piece		
Product weight	51.3 kg (113.1 lbs.)/piece		
<b>LOGISTIC SPECIFICATION</b>			
Packaging dimensions	H1360 x W598 x D354 mm (53.5 x 23.5 x 18.2 in.)/piece		
Gross weight	59.7 kg (131.6 lbs.)/piece		
Warranty period	5 years		
Finishes	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
Item no.	SP4049AA	SP4049CA	SP4050BA
UPC	637203048630	637203048654	637203048647
Finishes	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
Item no.	SP4049EA	SP4049WA	
UPC	637203048661	637203048678	

Reference 1 Meta

The compact standmount model that delivers expansive, high-performance sound beyond what its size suggests.



MSRP  
10.000€/pair

PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 165 mm (6.5 in.) aluminium cone
Frequency response	45 Hz – 35 kHz (±3 dB)
Amplifier requirements	50 - 200 W
Sensitivity	85 dB
Maximum output	111 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H440 x W205 x D422 mm (17.3 x 8.1 x 16.6 in.)/piece
Product weight	18.2 kg (40.1 lbs.)/piece



LOGISTIC SPECIFICATION			
Packaging dimensions	H585 x W598 x D354 mm (23 x 23.5 x 13.9 in.)/piece		
Gross weight	22.8 kg (50.3 lbs.)/piece		
Warranty period	5 years		
Finishes	a. High-gloss white/Champagne	b. High-gloss white/Blue	c. High-gloss black/Grey
Item no.	SP4048AA	SP4048CA	SP4048BA
UPC	637203048586	637203048609	637203048593
Finishes	d. High-gloss black/Copper	e. Satin Walnut/Silver	
Item no.	SP4048EA	SP4048WA	
UPC	637203048616	637203048623	


Reference 2 Meta

The centre speaker designed for people with smaller rooms but demand high-performance sound.



MSRP  
6.000€/piece

PRODUCT SPECIFICATION	
Design	hree-way closed box
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) aluminium cone
Frequency response	80 Hz – 35 kHz (±3 dB)
Amplifier requirements	50 - 300 W
Sensitivity	86 dB
Maximum output	113.5 dB
Impedance	4Ω (min. 3.2 Ω)
Dimensions	H205 x W630 x D335 mm (8.1 x 24.8 x 13.2 in.)/piece
Product weight	22.8 kg (50.3 lbs.)/piece



LOGISTIC SPECIFICATION			
Packaging dimensions	H760 x W598 x D354 mm (29.9 x 23.5 x 13.9 in.)/piece		
Gross weight	28.4 kg (62.6 lbs.)/piece		
Warranty period	5 years		
Finishes	a. High-gloss white/Champagne	b. High-gloss white/Blue	c. High-gloss black/Grey
Item no.	SP4048AA	SP4051CA	SP4051BA
UPC	637203048586	637203048753	637203048746
Finishes	d. High-gloss black/Copper	e. Satin Walnut/Silver	
Item no.	SP4051EA	SP4051WA	
UPC	637203048760	637203048777	

Reference 4 Meta

The flagship centre speaker for movie lovers looking for total immersion.



MSRP  
8.000€/piece

PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 165 mm (6.5 in.) aluminium cone
Frequency response	48 Hz – 35 kHz (±3 dB)
Amplifier requirements	50 - 400 W
Sensitivity	88 dB
Maximum output	116 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H205 x W1090 x D463 mm (8.1 x 42.9 x 18.2 in.)/piece
Product weight	45.2 kg (99.6 lbs.)/piece



LOGISTIC SPECIFICATION			
Packaging dimensions	H1333 x W598 x D354 mm (52.5 x 23.5 x 13.9 in.)/piece		
Gross weight	53.8 kg (118.6 lbs.)/piece		
Warranty period	5 years		
Finishes	a. High-gloss white/Champagne	b. High-gloss white/Blue	c. High-gloss black/Grey
Item no.	SP4052AA	SP4052CA	SP4052BA
UPC	637203048784	637203048807	637203048791
Finishes	d. High-gloss black/Copper	e. Satin Walnut/Silver	
Item no.	SP4052EA	SP4052WA	
UPC	637203048814	637203048821	

Accessories

Reference 5 Grille Pack\*



MSRP  
300/set

PRODUCT SPECIFICATION	
Package	Uni-Q grille: 2 pcs LF grille: 8 pcs

LOGISTIC SPECIFICATION	
Packaging dimensions	H223 x W422 x D137 mm (8.8 x 16.6 x 5.4 in.)/set
Gross weight	1.28 kg (2.8 lbs.)/set
Warranty period	2 years
Item no.	SP3882AA
UPC	637203042324

Reference 4c Grille Pack\*




MSRP  
180€/set

PRODUCT SPECIFICATION	
Package	Uni-Q grille: 1 pc LF grille: 4 pcs

LOGISTIC SPECIFICATION	
Packaging dimensions	H223 x W422 x D72 mm (8.8 x 16.6 x 2.8 in.)/set
Gross weight	0.7 kg (1.5 lbs.)/set
Warranty period	2 years
Item no.	SP3883AA
UPC	637203042331



### Reference 3 Grille Pack\*



MSRP  
**250€/set**

#### PRODUCT SPECIFICATION

**Package** Uni-Q grille: 2 pcs  
LF grille: 4 pcs

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D72 mm (8.8 x 16.6 x 2.8 in.)/set
<b>Gross weight</b>	0.73 kg (1.6 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3881AA
<b>UPC</b>	637203042317

### Reference 2 Grille Pack\*



MSRP  
**100€/set**

#### PRODUCT SPECIFICATION

**Package** Uni-Q grille: 1 pc  
LF grille: 2 pcs

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D47 mm (8.8 x 16.6 x 1.9 in.)/set
<b>Gross weight</b>	0.46 kg (1 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3887AA
<b>UPC</b>	637203042348

### Reference 1 Grille Pack\*



MSRP  
**130€/set**

#### PRODUCT SPECIFICATION

**Package** Uni-Q grille: 2 pcs  
LF grille: 2 pcs

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D47 mm (8.8 x 16.6 x 1.9 in.)/set
<b>Gross weight</b>	0.5 kg (1.1 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3880AA
<b>UPC</b>	637203042300

### S-RF1 Floor Stand\*



MSRP  
**1.250€/pair**

#### PRODUCT SPECIFICATION

**Dimensions** H542 x W260 x D387 mm  
(21.4 x 10.2 x 15.2 in.)/stand  
**Product weight** 7.95 kg (17.5 lbs.)/stand  
**Compatible models** Reference 1 meta

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H229 x W730 x D600 mm (8.7 x 28.7 x 23.6 in.)/set	
<b>Gross weight</b>	19.9 kg (43.9 lbs.)/set	
<b>Warranty period</b>	2 years	
<b>Finishes</b>	a. Carbon Black	b. Mineral White
<b>Item no.</b>	SP4061BA	SP4061AA
<b>UPC</b>	637203048999	637203049002

\*Fits both Reference and Reference Meta models

HiFi Speakers





# R Series

Performance redefined.  
An icon born from The Reference.




Developed for KEF's flagship The Reference, a suite of the latest technologies has now made its way into the new generation of the R Series. Whether in stereo for music or in a home theatre set up the R Series makes exceptional acoustic performance more accessible. Now with the groundbreaking Metamaterial Absorption Technology, the R Series reveals exquisite detail and incredible insight: truly an experience to savour.

Key Features	<ul style="list-style-type: none"><li>■ Metamaterial Absorption Technology (MAT™) eliminates 99% of high-frequency distortion for pure, natural sound</li><li>■ Bespoke 12<sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy</li><li>■ Refined tweeter gap damper tames resonances for improved detail</li><li>■ Flexible Decoupling Chassis prevents unwanted vibrations for better clarity</li><li>■ Enhanced crossover design with fine-tuned signal paths for maximum clarity</li><li>■ Microfibre grilles offer the perfect balance between driver protection, sonic performance and aesthetics</li></ul>
--------------	--

Key Technologies	<ul style="list-style-type: none"><li>■ Uni-Q®</li><li>■ MAT™</li></ul>
------------------	---

## R11 Meta

Flagship three-way floorstanding speakers




MSRP 6.800€/pair	
PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	46 Hz - 28 kHz (±3 dB)
Amplifier requirements	15 - 300 W
Sensitivity	90 dB
Maximum output	113 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H1296 x W311 x D384 mm (51.0 x 12.2 x 15.1 in.)/piece
Product weight	36.5 kg (80.5 lbs)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H1447 x W512 x D346 mm (57 x 20.2 x 13.6 in.)/piece		
Gross weight	43.5 kg (95.9 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4056B1AA	SP4056A1AA	SP4056W0AA
UPC	637203049774	637203049781	637203049798

## R7 Meta

Mid-sized three-way floorstanding speakers




MSRP 5.250€/pair	
PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	48 Hz - 28 kHz (±3 dB)
Amplifier requirements	15 - 250 W
Sensitivity	88 dB
Maximum output	111 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H1109 x W311 x D384 mm (43.7 x 12.2 x 15.1 in.)/piece
Product weight	29.3 kg (64.6 lbs)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H1261 x W512 x D346 mm (49.6 x 20.2 x 13.6 in.)/piece		
Gross weight	35.8 kg (78.9 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4055B1AA	SP4055A1AA	SP4055W0AA
UPC	637203049736	637203049743	637203049750
Finishes	d. Titanium Gloss Special Edition		
Item no.	SP4055H1AA		
UPC	637203049767		

R5 Meta

Compact three-way  
floorstanding speakers




MSRP  
3.600€/pair

PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 130 mm (5.25 in.) hybrid aluminium cone
Frequency response	52 Hz - 28 kHz (±3 dB)
Amplifier requirements	15 - 200 W
Sensitivity	87 dB
Maximum output	110 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H1072 x W272 x D344 mm (42.2 x 10.7 x 13.5 in.)/piece
Product weight	24.5 kg (54 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H1223 x W472 x D321 mm (48.1 x 18.6 x 12.6 in.)/piece		
Gross weight	31.4 kg (69.2 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4054B1AA	SP4054A1AA	SP4054W0AA
UPC	637203049705	637203049712	637203049729

R6 Meta

Flagship three-way  
centre channel speaker




MSRP  
1.900€/piece

PRODUCT SPECIFICATION	
Design	Three-way closed box
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	65 Hz - 28 kHz (±3 dB)
Amplifier requirements	15 - 250 W
Sensitivity	88 dB
Maximum output	111 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H200 x W625 x D339 mm (7.9 x 24.6 x 13.3 in.)/piece
Product weight	17.8 kg (39.2 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H336 x W769 x D456 mm (13.2 x 30.3 x 18 in.)/piece		
Gross weight	21.4 kg (47.2 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4058B1AA	SP4058A1AA	SP4058W0AA
UPC	637203049835	637203049842	637203049859

R3 Meta

Three-way bookshelf speaker




MSRP  
2.300€/pair

PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	58 Hz - 28 kHz (±3 dB)
Amplifier requirements	15 - 180 W
Sensitivity	87 dB
Maximum output	110 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H422 x W200 x D336 mm (16.6 x 7.9 x 13.2 in.)/piece
Product weight	12.4 kg (27.3 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H1261 x W512 x D346 mm (49.6 x 20.2 x 13.6 in.)/pair		
Gross weight	35.8 kg (78.9 lbs.)/pair		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4053B1AA	SP4053A1AA	SP4053W0AA
UPC	637203049668	637203049675	637203049682
Finishes	d. Indigo Gloss Special Edition		
Item no.	SP4053C1AA		
UPC	637203049699		

R2 Meta

Compact three-way  
centre channel speaker



MSRP  
1.500€/piece

PRODUCT SPECIFICATION	
Design	Three-way closed box
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 130 mm (5.25 in.) hybrid aluminium cone
Frequency response	67 Hz - 28 kHz (±3 dB)
Amplifier requirements	15 - 200 W
Sensitivity	87 dB
Maximum output	110 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H175 x W550 x D309 mm (6.9 x 21.7 x 12.2 in.)/piece
Product weight	15.4 kg (34.0 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H311 x W682 x D432 mm (12.2 x 26.9 x 17 in.)/piece		
Gross weight	18.1 kg (40 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4057B1AA	SP4057A1AA	SP4057W0AA
UPC	637203049804	637203049811	637203049828



## R8 Meta


Dolby Atmos surround speakers



MSRP  
**1.700€/pair**

### PRODUCT SPECIFICATION

Design	Two-way closed box
Drive units	<b>Uni-Q driver array</b> HF: 5 mm (1 in.) vented aluminium dome with MAT MF/LF: 130 mm (5.25 in.) aluminium cone
Frequency response	97 Hz - 17.5 kHz (±3 dB)
Amplifier requirements	25 - 150 W
Sensitivity	85 dB
Maximum output	106 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H174 x W175 x D259 mm (6.9 x 6.9 x 10.2 in.)/piece
Product weight	4.5 kg (9.9 lbs.)/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H301 x W467 x D388 mm (11.9 x 18.4 x 15.3 in.)/pair		
Gross weight	11.4 kg (25.1 lbs.)/pair		
Warranty period	5 years		
Finishes	a. Black Gloss	b. White Gloss	c. Walnut
Item no.	SP4059BA	SP4059AA	SP4059WA
UPC	637203218620	637203218637	637203218736

## Accessories

### S3 Floor Stand\*


Speaker stand for R3 Meta



MSRP  
**749/pair**

### PRODUCT SPECIFICATION

Dimensions	H542 x W260 x D387 mm (21.4 x 10.2 x 15.2 in.)/stand
Product weight	6.7 kg (14.7 lbs.)/stand



### LOGISTIC SPECIFICATION

Packaging dimensions	H205 x W730 x D600 mm (8.1 x 28.7 x 23.6 in.)/pair		
Gross weight	17.4 kg (38.4 lbs.)/pair		
Warranty period	2 years		
Finishes	a. Slate Grey	b. Mineral White	c. Indigo Matte Special Edition
Item no.	SP4062MA	SP4062AA	SP4062CA
UPC	637203049019	637203049026	637203049866

\*Fits both R3 and R3 Meta models



# Q Series

The Q Series with MAT™ always has the sound solution for you



The 9<sup>th</sup> iteration of the Q Series is upgraded with Metamaterial Absorption Technology (MAT™). From compact bookshelf speakers and slender on-wall speaker to powerful floorstanding and home cinema models, the new Q Series fits any room, any budget - perfect for music, TV, movies, and gaming. Now impeccable, high-fidelity sound is more accessible than ever.

## Key Features

- Metamaterial Absorption Technology (MAT™) eliminates 99% of high-frequency distortion for pure, natural sound
- 12<sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy
- Enhanced crossover design with fine-tuned signal paths for pristine, clean sound
- Three-way design for enhanced clarity and detail (Q11 Meta, Q7 Meta, Q Concerto Meta, Q6 Meta)
- Hybrid aluminium cone LF driver for deep and powerful bass (Q11 Meta, Q7 Meta, Q Concerto Meta, Q6 Meta)
- Magnetic grilles offer the perfect balance between driver protection and aesthetics

## Key Technologies

- Uni-Q®
- MAT™

## Q11 Meta


Flagship 3-way floorstanding speaker



MSRP  
**2.198€/pair**

### PRODUCT SPECIFICATION

Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4 in.) aluminium cone <b>Bass units</b> 3 x 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	44 Hz - 20 kHz (±3 dB)
Amplifier requirements	15 - 225W
Sensitivity	89 dB
Maximum output	113 dB
Impedance	4Ω (min. 3.2 Ω)
Dimensions	H1112 x W317 x D380 mm (43.8 x 12.5 x 15.0 in.)/piece
Product weight	22.5 kg (49.6 lbs.)/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H1211 x W500 XD349 mm ( 47.7 x 19.7 x 13.7 in.)/piece		
Gross weight	28.9 kg (63.7 lbs)/piece		
Warranty period	5 years		
Finishes	a. Satin Black	b. Satin White	c. Walnut
Item no.	SP4093B0AA / SP4093B0A1	SP4093A0AA / SP4093A0A1	SP4093W0AA / SP4093W0A1
UPC	637203219016	637203219009	637203218996

## Q7 Meta


3-way floorstanding speaker



MSRP  
**1.598€/pair**

### PRODUCT SPECIFICATION

Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4 in.) aluminium cone <b>Bass units</b> 2 x 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	46 Hz - 20 kHz (±3 dB)
Amplifier requirements	15 - 200W
Sensitivity	87 dB
Maximum output	110 dB
Impedance	4Ω (min. 3.2 Ω)
Dimensions	H1001 x W317 x D315 mm (39.4 x 12.5 x 12.4 in.)/piece
Product weight	18.4 kg (40.6 lbs.)/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H1099 x W433 XD349 mm ( 43.3 x 17.0 x 13.7 in.)/piece		
Gross weight	24.2 kg (53.4 lbs.)/piece		
Warranty period	5 years		
Finishes	a. Satin Black	b. Satin White	c. Walnut
Item no.	SP4092B0AA / SP4092B0A1	SP4092A0AA / SP4092A0A1	SP4092W0AA / SP4092W0A1
UPC	637203219047	637203219030	637203219023



Q Concerto Meta

3-way bookshelf speaker





MSRP  
**1.198€/pair**

PRODUCT SPECIFICATION	
Design	Three-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4 in.) aluminium cone <b>Bass units</b> 165 mm (6.5 in.) hybrid aluminium cone
Frequency response	48 Hz - 20 kHz (±3 dB)
Amplifier requirements	15 - 180W
Sensitivity	85 dB
Maximum output	108 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H415 x W210 x D315 mm (16.3 x 8.3 x 12.4 in.)/piece
Product weight	9.5 kg (20.9 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H549 x W600 XD440 mm ( 21.6 x 23.6 x 17.3 in.)/pair		
Gross weight	22.1 kg (48.7 lbs)/pair		
Warranty period	5 years		
Finishes	a. Satin Black	b. Satin White	c. Walnut
Item no.	SP4090B0AA/ SP4090B0A1	SP4090A0AA/ SP4090A0A1	SP4090W0AA/ SP4090W0A1
UPC	637203219108	637203219092	637203219085

Q3 Meta

2-way bookshelf speaker





MSRP  
**698€/pair**

PRODUCT SPECIFICATION	
Design	Two-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT LF/MF: 165 mm (6.5 in.) aluminium cone
Frequency response	49 Hz - 20 kHz (±3 dB)
Amplifier requirements	15 - 150W
Sensitivity	87 dB
Maximum output	109 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H357 x W210 x D305 mm (14.1 x 8.3 x 12.0 in.)/piece
Product weight	8.2 kg (18.1 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H492 x W600 XD430 mm ( 19.4 x 23.6 x 16.9 in.)/pair		
Gross weight	19.5 kg (43.0 lbs)/pair		
Warranty period	5 years		
Finishes	a. Satin Black	b. Satin White	c. Walnut
Item no.	SP4089B0AA/ SP4089B0A1	SP4089A0AA/ SP4089A0A1	SP4089W0AA/ SP4089W0A1
UPC	637203219139	637203219122	637203219115

Q1 Meta

2-way bookshelf speaker





MSRP  
**548€/pair**

PRODUCT SPECIFICATION	
Design	Two-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT LF/MF: 130 mm (5.25 in.) aluminium cone
Frequency response	51 Hz - 20 kHz (±3 dB)
Amplifier requirements	10 - 150W
Sensitivity	86 dB
Maximum output	108 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H302 x W180 x D277 mm (11.9 x 7.1 x 10.9 in.)/piece
Product weight	6.1 kg (13.4 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H438 x W539 XD399 mm ( 17.2 x 21.2x 15.7in.)/pair		
Gross weight	14.8 kg (32.6 lbs)/pair		
Warranty period	5 years		
Finishes	a. Satin Black	b. Satin White	c. Walnut
Item no.	SP4087B0AA/ SP4087B0A1	SP4087A0AA/ SP4087A0A1	SP4087W0AA/ SP4087W0A1
UPC	637203219160	637203219153	637203219146

Q4 Meta

2-way on-wall speaker



MSRP  
**399€/piece**

PRODUCT SPECIFICATION	
Design	Two-way bass reflex
Drive units	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium domewith MAT MF/LF: 130 mm (5.25 in.) aluminium cone
Frequency response	65 Hz - 20 kHz (±3 dB)
Amplifier requirements	10 - 150W
Sensitivity	86 dB
Maximum output	108 dB
Impedance	4 Ω (min. 3.2 Ω)
Dimensions	H400 x W250 x D142 mm (15.7 x 9.8 x 5.6 in.)/piece
Product weight	5.7 kg (12.6 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H500 x W352 XD231 mm ( 19.7 x 13.9 x 9.1in.)/piece		
Gross weight	6.9 kg (15.2 lbs)/piece		
Warranty period	5 years		
Finishes	a. Satin Black	b. Satin White	c. Walnut
Item no.	SP4088B0AA/ SP4088B0A1	SP4088A0AA/ SP4088A0A1	SP4088W0AA/ SP4088W0A1
UPC	637203219177	637203219164	637203219191







# LS50 Meta

The World's First Speakers  
with Metamaterial



LS50 Meta is a highly precise, emotionally engaging loudspeaker built on revolutionary acoustic technology. Designed around the Uni-Q 12<sup>th</sup> Generation with Metamaterial Absorption Technology driver array, this solid, compact loudspeaker is capable of delivering detailed sound anywhere in the room.

Key Features	■ Metamaterial Absorption Technology eliminates 99% of high-frequency distortion for pure, natural sound
	■ 12 <sup>th</sup> generation Uni-Q with MAT™ driver array for exceptional acoustic accuracy
	■ Driver Performance Optimisation for enhanced sonic performance, less distortion and reduced coloration
	■ Patented off-set flexible port for reduced midrange coloration with exceptional levels of depth and detail
Key Technologies	■ Uni-Q®
	■ MAT™

## LS50 Meta


The World's First Speakers  
with Metamaterial



MSRP 1.399€/pair	
PRODUCT SPECIFICATION	
Design	Two-way bass reflex
Drive units	Uni-Q driver array HF: 25 mm (1 in.) vented aluminium dome with MAT MF/LF: 130 mm (5.25 in.) aluminium cone
Frequency response	9 Hz - 28 kHz (±3 dB)
Amplifier requirements	40-100 W
Sensitivity	85 dB
Maximum output	106 dB
Impedance	8 Ω (min. 3.5 Ω)
Dimensions	H302 x W200 x D280.5 mm (11.9 x 7.9 x 11.0 in.)/piece
Product weight	7.8 kg (17.2 lbs.)/piece

LOGISTIC SPECIFICATION			
Packaging dimensions	H407 x W565 x D368 mm (16 x 22.2 x 14.5 in.)/pair		
Gross weight	17.8 kg (39.2 lbs.)/pair		
Warranty period	5 years		
Finishes	Carbon Black	Moss Green	c. Mineral White
Item no.	SP4027BA	SP4027J2AA, SP4027J2A1	SP4027AA
UPC	637203217791	637203219290	637203217906
Finishes	Sand Shell		
Item no.	SP4027A5AA, SP4027A5A1		
UPC	637203219306		

# Wireless HiFi Speakers & Accessories

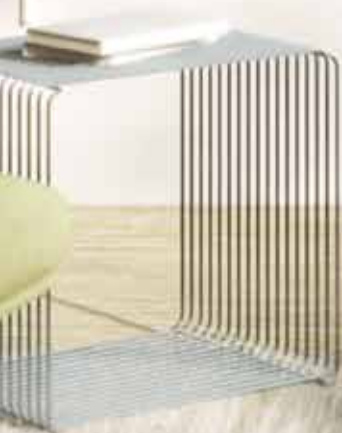

# XIO

## Soundbar





Whether it's memorable on-screen performances, breathtaking special effects, or simply a new reality TV show, some scenes deserve high-quality sound. The XIO soundbar enhances your TV nights with high-fidelity performance, designed to give your sound a fantastic spatial dimension. With its 5.1.2 configuration, spatial audio technology, and 12 Class D amplifiers, the XIO looks like a soundbar; but its acoustic performance is so impressive that it can compete with traditional KEF Hi-Fi systems.

- Feature Summary
- 5.1.2 configuration and compatible with Dolby Atmos, DTS:X, Airplay Spatial Audio, and Sony 360 Reality Audio
  - 12 Class D amplifiers, impeccable Hi-Fi sound from a single soundbar
  - Superior midrange performance for crystal-clear dialogue
  - Upmixing technology to convert mono/stereo sources to multichannel
  - Intelligent Placement Technology (IPT) to optimize acoustic performance, wherever the soundbar is placed
  - P185 woofer with Flex technology for deep, precise bass in an ultra-thin profile

### XIO

Cinema-quality sound



PPI (Piece)

2.299€

DESCRIPTION		
Technologies	Uni-Q MX, MIE, VECO	
SPECIFICATIONS		
Speakers)	Uni-Q Set: Tweeter/MF: 6 x 50 mm Uni-Q MX drivers Tweeter/MF: 2 x 50 mm full-range drivers LF: 4 pieces of 50 x 152 mm P185 drivers, supported by VECO	
Frequency response	34 Hz - 20kHz (±3 dB)	
Power	840W	
Amplifier class	Class D	
MAX SPL	102 dB	
Inputs	HDMI eARC TOSLINK, optical, USB Type C (service), RJ45 Ethernet (network)	
Outputs	Wireless Subwoofer Output RCA Subwoofer Output	
Dimensions (HxLxD)	70 x 1210 x 165 mm	
Product weight	10,5 kg	
LOGISTIC SPECIFICATIONS		
Shipping box size	1269 x 1446 x 161 mm	
Gross weight	16,3 kg	
Warranty	2 years	
Finishes	a. Slate Black	b. SilverGrey
SKU code KEF	SP4083B0AA	SP4083M0AA
EAN/UPC	637203051210	637203051142

Accessoires

KW2

Wireless Subwoofer Adapter



PPI (Piece)179€

SPECIFICATIONS	
Radio Frequency	5.2GHz and 5.8GHz
Sampling rate	24bit, 48KHz
Latency	<17ms
Range	30m max (in open fields)
Frequency response	20 Hz - 22 kHz
Signal-to-noise ratio	>80 dB
Transmitter power input	5V DC 1A
Audio output level	2 V
Audio input level	2 V
Total harmonic distortion	typ. -90 dB
Radio frequency output power	5150-5250MHz<=2 dBm 5725-5850MHz<=7 dBm
Dimensions (HxWxD)	21.4 x 72 x 79.5 mm /piece

LOGISTICS SPECIFICATIONS	
Dimensions	109 x 152 x 57 mm
Gross weight	0.211kg
Warranty	2 years
HS Code	85255000(00)
KEF SKU Code	SP4082B0AA
EAN/UPC	637203219252

C3 Remote Control LS Wireless Collection

The C3 remote control offers advanced features for the LS Wireless collection: LS60 Wireless, LS50 Wireless II, LSX II, LSX II LT and XIO. The slim, ergonomic design of the C3 remote control, with its aluminum control panel, is both elegant and practical.



PPI (Piece)110€

SPECIFICATIONS	
Dimensions (HxLxD)	185 x 44 x 18 mm
Product weight	0,1 kg
LOGISTIC SPECIFICATIONS	
Shipping size (box)	220 x 156 x 38 mm
Gross weight	0,103 kg (piece)
Warranty	2 years
Finishes	Charcoal Grey
KEF SKU code	SP4113H0AA
EAN/UPC	637203051289



# LS Wireless Collection

## Immersion engines



KEF's engineers and designers have always been looking and listening ahead. The LS Wireless Collection is the sound of the future, bringing breakthrough technology including Uni-Q, Uni-Core, Metamaterial Absorption Technology (MAT) and Music Integrity Engine (MIE), into the home in a series of all-in-one, plug and play speaker systems. Each of the four models – LS60 Wireless, LS50 Wireless II, LSX II and LSX II LT – are specially developed to deliver room-filling, immersive sound experience for music, TV, movies and gaming. Stream High-Fidelity sound in its truest form, from any source, every time.

### LS60 Wireless

The immersion engine




MSRP  
5.499€/system

#### PRODUCT DESCRIPTION

**Key technologies** Uni-Q, MAT, Uni-core, SAS, MIE

#### PRODUCT SPECIFICATION

<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4in.) aluminium cone <b>Uni-Core Force Cancelling Driver</b> LF: 4 x 135 mm (5.25 in.)
<b>Frequency response</b>	31 Hz - 24 kHz (±3 dB)
<b>Amplifier power (per speaker)</b>	HF: 100 W, MF: 100 W, LF: 500 W
<b>Amplifier class (per speaker)</b>	HF: Class AB, MF: Class D, LF: Class D
<b>MAX SPL</b>	111 dB (measured at 1 m)
<b>Inputs</b>	HDMI eARC, TOSLINK Optical, Digital Coaxial, Analog RCA, USB Type A (service), RJ45 Ethernet (network), RJ45 Ethernet (interspeaker)
<b>Output</b>	RCA Subwoofer output
<b>Dimensions</b>	H1090 x W212 x D394 mm (42.9 x 8.3 x 15.5 in.)/piece
<b>Product weight</b>	62.4 kg (138 lbs.)/set



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1260 x W520 x D310 mm (49.6 x 20.5 x 12.2 in.)/piece		
<b>Gross weight</b>	39 kg (86 lbs.)/piece		
<b>Warranty period</b>	2 years electronics, 5 years drivers		
<b>Finishes</b>	a. Carbon Black	b. Titanium Grey	c. Mineral White
<b>Item no.</b>	SP4017BB	SP4017HB	SP4017AB
<b>UPC</b>	637203050138	637203048203	637203048197
<b>Finishes</b>	-		
<b>Item no.</b>	-		
<b>UPC</b>	-		

### LS50 Wireless II

The Ultimate Wireless HiFi Speakers




MSRP  
2.499€/system

#### PRODUCT DESCRIPTION

**Key technologies** Uni-Q, MAT, MIE

#### PRODUCT SPECIFICATION

<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT LF: 130 mm (5.25 in.) aluminium cone
<b>Frequency response</b>	45 Hz - 28 kHz (±3 dB)
<b>Amplifier power (per speaker)</b>	HF: 100 W, LF: 280 W
<b>Amplifier class (per speaker)</b>	HF: Class AB, MF: Class D, LF: Class D
<b>MAX SPL</b>	108 dB (measured at 1 m)
<b>Inputs</b>	<b>Primary speaker</b> HDMI eARC, TOSLINK Optical, Digital Coaxial, Analog 3.5mm Auxiliary, USB Type A (service), RJ45 Ethernet (network), RJ45 Ethernet (interspeaker) <b>Secondary speaker</b> USB Type A (service), RJ45 Ethernet (interspeaker)
<b>Output</b>	RCA Subwoofer output
<b>Dimensions</b>	H305 x W200 x D311 mm (12.0 x 7.9 x 12.2 in.)/piece
<b>Product weight</b>	20.1 kg (44.3 lbs.)/set



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H405 x W595 x D415 mm (15.9 x 23.4 x 16.3 in.)/pair		
<b>Gross weight</b>	23.5 kg (51.8 lbs.)/pair		
<b>Warranty period</b>	2 years electronics, 5 years drivers		
<b>Finishes</b>	a. Carbon Black	b. Mineral White	c. Moss Green
<b>Item no.</b>	SP4025BB	SP4025AB	SP4025J2AA
<b>UPC</b>	637203046926	637203046933	637203051678
<b>Finishes</b>	d. Sand Shell		
<b>Item no.</b>	SP4025A5AA		
<b>UPC</b>	637203051593		

LSX II

The Definitive Compact Wireless HiFi




MSRP  
1.399€/system

PRODUCT DESCRIPTION

Key technologiesUni-Q, MIE

PRODUCT SPECIFICATION

Drive units	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4in.) aluminium cone <b>Uni-Core Force Cancelling Driver</b> LF: 4 x 135 mm (5.25 in.)
Frequency response	54 Hz ~ 28 kHz (±3 dB)
Amplifier power (per speaker)	HF: 30W, LF: 70W
Amplifier class (per speaker)	HF: Class D, LF: Class D
MAX SPL	102 dB (measured at 1m)
Inputs	<b>Primary speaker</b> HDMI ARC, TOSLINK Optical, USB Type C, Analog 3.5mm Auxiliary, RJ45 Ethernet (network), RJ45 Ethernet (interspeaker) <b>Secondary speaker</b> RJ45 Ethernet (interspeaker)
Output	RCA Subwoofer output
Dimensions	H240 x W155 x D180 mm (9.5 x 6.1 x 7.1 in.)/piece
Product weight	7.2 kg (15.6 lbs.)/pair



LOGISTIC SPECIFICATION		
Packaging dimensions	H355 x W430 x D250 mm (14 x 16.9 x 9.8 in.)/pair	
Gross weight	10 kg (22 lbs.)/pair	
Warranty period	2 years electronics, 5 years drivers	
Finishes	a. Carbon Black	b. Soundwave by Terence Conran
Item no.	SP4041BB	SP4041DB
UPC	637203047817	6637203047831
Finishes	-	
Item no.	-	
UPC	-	

Accessories

S2 Floor Stand


Stands that deliver



MSRP  
475€/pair

PRODUCT SPECIFICATION

Dimensions	H657 x W226 x D308 mm (25.9 x 8.9 x 12.1 in.)/stand
Product weight	4.85 kg (10.7 lbs.)/stand
Compatible models	LS50 Wireless II, LS50 Meta



LOGISTIC SPECIFICATION			
Packaging dimensions	H140 x W680 x D380 mm (5.5 x 26.8 x 15 in.)/pair		
Gross weight	11 kg (24.3 lbs.)/pair		
Warranty period	2 years		
Finishes	a. Carbon Black	b. Titanium Grey	c. Mineral White
Item no.	SP4030BA	SP4030HA	SP4030AA
UPC	637203046735	637203046759	637203046742
Finishes	d. Royal Blue Special Edition	e. Crimson Red Special Edition	
Item no.	SP4030CA	SP4030KA	
UPC	637203046780	637203046797	

\*Fits both LS50 Meta and LS50 Wireless II

LSX II LT

The new addition to the award-winning LSX family




MSRP  
999€/system

PRODUCT DESCRIPTION

Key technologiesUni-Q, MIE

PRODUCT SPECIFICATION

Drive units	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) aluminium dome LF/MF: 115 mm (4.5 in.) magnesium/aluminium alloy cone
Frequency response	54 Hz ~ 28 kHz (±3 dB)
Amplifier power (per speaker)	HF: 30 W, LF: 70 W
Amplifier class (per speaker)	HF: Class D, LF: Class D
MAX SPL	102 dB (measured at 1m)
Inputs	<b>Primary speaker</b> HDMI ARC, TOSLINK Optical, USB Type C, USB Type C (interspeaker), RJ45 Ethernet (network) <b>Secondary speaker</b> USB Type C (interspeaker)
Output	RCA Subwoofer output
Dimensions	H240 x W155 x D180 mm (9.5 x 6.1 x 7.1 in.)/piece
Product weight	6.8 kg (15 lbs.)/pair



LOGISTIC SPECIFICATION			
Packaging dimensions	H320 x W475 x D255 mm (12.6 x 18.7 x 10 in.)/pair		
Gross weight	9 kg (19.8 lbs.)/pair		
Warranty period	2 years electronics, 5 years drivers		
Finishes	a. Graphite Grey	b. Stone White	c. Sage Green
Item no.	SP4077M2BA	SP4077A2BA	SP4077J2BA
UPC	637203050626	637203050480	637203050558

S1 Floor Stand


Speaker stand for LSX II & LSX II LT



MSRP  
349€/pair

PRODUCT SPECIFICATION

Dimensions	H683 x W208 x D251 mm (26.9 x 8.2 x 9.9 in.)/stand
Product weight	2.93 kg (6.5 lbs.)/stand
Compatible models	LSX II, LSX II LT



LOGISTIC SPECIFICATION			
Packaging dimensions	H144 x W731 x D341 mm (5.7 x 28.8 x 13.4 in.)/pair		
Gross weight	7.4 kg (16.3 lbs.)/pair		
Warranty period	2 years		
Finishes	a. Cobalt Blue	b. Slate Grey	c. Crimson Red
Item no.	SP4030BA	SP4030HA	SP4030AA
UPC	637203046735	637203046759	637203046742
Finishes	d. Mineral White		
Item no.	SP4030CA		
UPC	637203046780		



### P1 Desk Pad


Desk Pad designed for LSX II and LSX II LT



MSRP  
159€/pair

PRODUCT SPECIFICATION

Dimensions	H27.5 x W146.7 x D167.5 mm (25.9 x 8.9 x 12.1 in.)/piece
Compatible models	LSX II, LSX II LT



LOGISTIC SPECIFICATION

Packaging dimensions	H102 x W221 x D204 mm (4 x 8.7 x 8 in.)/pair	
Gross weight	1.5 kg (3.3 lbs.)/pair	
Warranty period	2 years	
Finishes	a. Black	b. Silver
Item no.	SP4013BA	SP4013GA
UPC	637203046025	637203046032

### B1 Wall Bracket


Wall mount bracket for LSX II



MSRP  
229€/pair

PRODUCT SPECIFICATION

Dimensions	H169 x W146.7 x D208.7 mm (6.7 x 5.8 x 8.2 in.)/piece
Compatible models	LSX II



LOGISTIC SPECIFICATION

Packaging dimensions	H123 x W304 x D224 mm (4.8 x 12 x 8.8 in.)/pair	
Gross weight	1.45 kg (3.2 lbs.)/pair	
Warranty period	2 years	
Finishes	a. Black	b. Silver
Item no.	SP4015BA	SP4015GA
UPC	637203046070	637203046063

### K-Stream

Interspeaker cable



MSRP  
159€/piece

PRODUCT SPECIFICATION

Standard	Category 6A cable (Cat 6A)
Length	8 metres
Compatible models	LS60 Wireless, LS50 Wireless II, LSX II



LOGISTIC SPECIFICATION

Packaging dimensions	H230 x W230 x D60 mm (9.1 x 9.1 x 2.4 in.)/piece	
Gross weight	0.5 kg (1.1 lbs.)/piece	
Warranty period	2 years	
Finishes	a. White with Copper	b. Titanium with Copper
Item no.	SP4063AX	SP4063HX
UPC	637203049095	637203049101

### C-Link Interspeaker Cable

Interspeaker cable for LSX II LT



MSRP  
59€/piece

PRODUCT SPECIFICATION

Length	8 metres
Compatible models	LSX II LT



LOGISTIC SPECIFICATION

Packaging dimensions	H187 x W230 x D40 mm (7.4 x 9.1 x 1.6 in.)/piece	
Gross weight	0.41 kg (0.9 lbs.)/piece	
Warranty period	2 years	
Finishes	Black	
Item no.	SP4103B0AA	
UPC	637203050961	

### C3 Remote

Remote for LS Wireless Collection



MSRP  
119€/piece

PRODUCT SPECIFICATION

Dimensions	H185 x W44 x D18 mm (7.3 x 1.7 x 0.7 in.)/piece
Product weight	0.1kg (0.22 lbs.)/piece
Compatible models	Fully compatible: LS60 Wireless, LS50 Wireless II Partially compatible: LSX II (CX button is not supported) LSX II LT (CX and AUX are not supported)
Batteries	2 x AAA batteries

LOGISTIC SPECIFICATION

Packaging dimensions	H220 x W156 x D38 mm (8.7 x 6.1 x 1.5 in.)/piece	
Gross weight	0.23 kg (0.5 lbs.)/piece	
Warranty period	2 years	
Finishes	Dark Grey	
Item no.	SP4113H0AA	
UPC	637203051289	

**MUO**  
 Portable Bluetooth speaker



**MSRP (System) 269€**

DESCRIPTION	
Key technologies	MIE, LF= racetrack = driver
PRODUCT SPECIFICATION	
Drive Units	HF: 20 mm MF/LF: 58 x 117 mm, P-Flex surround
Frequency response	43 Hz – 20 kHz (±3 dB)
Amplifier power (per speaker)	HF: 1 x 10W Class D MF/LF: 1 x 30W Class D
Amplifier class (per speaker)	HF: 1 x 10W Class D MF/LF: 1 x 30W Class D
MAX SPL	90±3 dB (at 1 m)
Inputs	Bluetooth 5.4 USB-C (Charging and playback)
Outputs	-
Dimensions (HxLxW)	216 × 82 × 59 mm/piece
Product weight	0,74 kg/piece

LOGISTIC SPECIFICATION					
Packaging dimensions	250 x 108 x 98 mm				
Gross weight	1,09 kg/pièce				
Warranty period	2 years				
Finishes	Midnight Black	Silver Dusk	Amber Haze	Moss Green	Cocoa Brown
Item no.	SP4105B2AA	SP4105G2AA	SP4105L2AA	SP4105J2AA	SP4105P2AA
EAN	637203051807	637203051814	637203051821	637203051852	637203051869
Finishes	-				
Code article produit KEF	-				
Code barre EAN	-				

# Headphones & Accessories



# Mu Headphones

Sound by KEF. Design by Ross Lovegrove.



Introducing Mu earphones and headphones, designed in collaboration with Ross Lovegrove. A design that complements KEF's obsession with pure, accurate sound, Mu earphones and headphones are the new chapter in the sound and design journey of KEF and Ross Lovegrove.

Key Features	■ Active Noise Cancellation tuned to eliminate external sound while preserving nuance and detail
	■ Full-range dynamic driver engineered to reveal the smallest details
	■ Exceptionally stable connections with both iOS and Android devices
	■ Intuitive touch control of music and calls
	■ Fast charging
	■ Ergonomic design for comfort and fit

## Mu7

Noise Cancelling Over-ear  
Wireless Headphones

	MSRP <b>399€</b> /piece
	PRODUCT SPECIFICATION
Speaker drivers	40 mm
Max power output	15 mW
Bluetooth	5.1
Codec	SBC, AAC, aptX, aptX HD
Battery play time	40 hrs (BT + ANC on)
Fast Charging for 15 mins	8 hrs battery play time
Dimensions	H199 x W153 x D89 mm (7.8 x 6 x 3.5 in.)/piece
Product weight	309 g/piece
	
LOGISTIC SPECIFICATION	
Packaging dimensions	H80 x W260 x D230 mm (3.1 x 10.2 x 9.1 in.)/piece
Gross weight	1 kg (2.2 lbs.)/piece
Warranty period	2 years
Finishes	a. Silver Grey      b. Charcoal Grey
Item no.	SP4029GA      SP4029HA
UPC	637203047329      637203047473

## Mu3

Noise Cancelling True  
Wireless Earphones

	MSRP <b>229€</b> /set
	PRODUCT SPECIFICATION
Speaker drivers	8.2 mm
Max power output	5 mW
Bluetooth	5.0
Codec	SBC, AAC
Battery play time	Earbud: 9 hrs (BT + ANC on) Charging case: 15 hrs
Fast Charging for 15 mins	1 hr battery play time
Dimensions	Earbud: H24.5 x W17.5 x D26.3 mm (1 x 0.7 x 1 in.)/piece Charging case: H33.5 x W62 x D52 mm (1.3 x 2.4 x 2 in.)/piece
Product weight	Earbud: 5.8 g/piece Charging case: 46.8 g/piece
	
LOGISTIC SPECIFICATION	
Packaging dimensions	H62 x W162 x D130 mm (2.4 x 6.4 x 5.1 in.)/piece
Gross weight	0.31 kg (0.7 lbs.)/piece
Warranty period	2 years
Finishes	a. Silver Grey      b. Charcoal Grey
Item no.	SP4028GA      SP4028HA
UPC	637203047312      637203047466

Accessories

Mu7 Carrying Case

Protect your headphones in style



MSRP  
Service Part

PRODUCT SPECIFICATION	
Dimensions	H250 x W220 x D65 mm (9.8 x 8.7 x 2.6 in.)/piece
LOGISTIC SPECIFICATION	
Item no.	SS4029-01G6
UPC	637203048869

Mu7 Ear Cushions

Designed for comfort



MSRP  
Service Part

PRODUCT SPECIFICATION		
Dimensions	H102 x W79 x D26 mm (4 x 31 x 1 in.)/piece	
PRODUCT SPECIFICATION		
Finishes	a. Silver Grey	b. Charcoal Grey
Item no.	SS4029-01G2	SS4029-01G13
UPC	637203048845	637203048821


Mu7 3.5mm Audio Cord

Wired or wireless, your choice



MSRP  
Service Part

PRODUCT SPECIFICATION	
Length	1.2m



PRODUCT SPECIFICATION		
Finishes	a. Silver Grey	b. Charcoal Grey
Item no.	SS4029-01G15	SS4029-01G14
UPC	637203048852	637203048838


Mu3 Charging Case

Power for the whole day



MSRP  
Service Part

PRODUCT SPECIFICATION	
Dimensions	H33.5 x W62 x D52 mm (1.3 x 2.4 x 2 in.)/piece
Product weight	46.8g/piece
Battery play time	15 hrs
Battery charging	USB-C



LOGISTIC SPECIFICATION		
Finishes	a. Silver Grey	b. Charcoal Grey
Item no.	SS4028-01G7	SS4028-01G16
UPC	637203047527	637203047596

Mu3 Ear Tips

Designed for best fit



MSRP  
Service Part

PRODUCT SPECIFICATION	
Package	3 pairs
Dimensions	Large: 12.9mm (0.5 in.) Medium: 12mm (0.47 in.) Small: 10.7mm (0.42 in.) Short: 12.1mm (0.48 in.)



LOGISTIC SPECIFICATION				
Finishes	a. Silver Grey			
Size	Short	Small	Medium	Large
Item no.	SS4028-01G6B	SS4028-01G3B	SS4028-01G4B	SS4028-01G5B
UPC	637203047565	637203047534	637203047541	637203047558
Finishes	b. Charcoal Grey			
Size	Short	Small	Medium	Large
Item no.	SS4028-01G21B	SS4028-01G18B	SS4028-01G19B	SS4028-01G20B
UPC	637203047640	637203047619	637203047626	637203047633





# Subwoofers & Accessories



# Subwoofers

Immersive power of deep detailed bass



Take home the immersive power of deep detailed bass with unrivalled acoustic accuracy that drops you right into the heart of the action. Over 60 years of innovation in crafting award-winning speakers has made us an authority in sound, and our subwoofer range brings home the visceral experience of modern immersive sound like no other for movies, gaming, music, and streaming.

## Reference 8b

Twin 9-inch driver force-cancelling subwoofer



**MSRP**  
7.500€/piece

**PRODUCT FEATURES**

- Two 500W Class D amplifiers
- KEF's ingenious force-cancelling technology
- Designed, engineered, handcrafted in Maidstone, UK

**PRODUCT SPECIFICATION**

Design	Force cancelled closed box
Drive units	L F: 2 x 225 mm (9 in.)
Frequency response	24 Hz (±3 dB)
Amplifier type	2 x 500 W Class D with switched mode power supply and DSP based control section
Maximum output	110 dB(peak sound pressure level at 1m/50 Hz)
Variable low pass filter	Variable frequency: 40 Hz to 160 Hz Variable slope: 12 dB/oct, 16 dB/oct, 24 dB/oct LFE mode: 350 Hz, 18 dB/oct
Input	RCA phono sockets Analog XLR socket
Power requirements	100 V - 120 V / 220 V - 240 V, 50/60 Hz
Power consumption	1000 W
Dimensions	H398 x W365 x D429 mm (15.7 x 14.4 x 16.8 in.)/piece
Product weight	34kg (75 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H598 x W556 x D496 mm (23.5 x 21.9 x 19.5 in.)/piece
Gross weight	40.7 kg (89.7 lbs.)/piece
Warranty period	2 years electronics, 5 years drivers
Item no.	SP3868BA
UPC	637203042430

## KC92

Twin 9-inch driver force-cancelling subwoofer



**MSRP**  
2.399€/piece

**PRODUCT FEATURES**

- Twin 9-inch force-cancelling driver array
- P-Flex pressure resistant surround design
- Music Integrity Engine® (MIE) – in-house developed DSP to further optimise performance
- iBX Intelligent Bass Extension allows to play louder and remain dynamic at any listening level
- Five room placement settings
- 1000W (2 x 500W) RMS Class D amplification
- Compact sealed cabinet
- Exceptionally versatile controls for easy integration with any loudspeaker and any home environment

**Key technologies** MIE

**PRODUCT SPECIFICATION**



Design	Force cancellation
Drive units	L F: 2 x 9" drivers
Frequency response	11 Hz – 200 Hz (±3 dB)
Amplifier power	1000W RMS (2 x 500W RMS)
Amplifier class	Built-in Class D
Maximum output	110 dB
Variable low pass filter	40 Hz – 140 Hz, LFE4
Input	RCA phono sockets Speaker level inputs Expansion port for KW1
Power requirements	100 - 240 V, 50/60 Hz
Power consumption	1000 W
Dimensions	H352.4 x W330 x D360.5 mm (13.9 x 13 x 14.2 in.)/piece
Product weight	20kg (44.1 lbs.)/piece



LOGISTIC SPECIFICATION	
Packaging dimensions	H495 x W460 x D460 mm (19.5 x 18.1 x 18.1 in.)/piece
Gross weight	22.6 kg (49.8 lbs.)/piece
Warranty period	2 years electronics, 5 years drivers
Finishes	a. White Gloss      b. Black Gloss
Item no.	SP4076A0BA      SP4076B0BA
UPC	637203050893      637203050824

KC62

The biggest small subwoofer



MSRP

1.699€/piece

PRODUCT FEATURES

- Twin 6.5-inch Uni-Core force cancelling driver array
- P-Flex pressure resistant surround design
- Smart Distortion Control Technology
- Music Integrity Engine with iBX, Smart Limiter and Room Placement settings
- 1000W (2 x 500W) RMS Class D amplification
- Compact sealed aluminium cabinet
- Exceptionally versatile controls for easy integration with any loudspeaker and any home environment

Key technologies

Uni-Core®

PRODUCT SPECIFICATION

Design	Uni-Core force cancellation
Drive units	L F: 2 x 6.5 in. drivers
Frequency response	11Hz – 200Hz (±3dB)
Amplifier power	1000W RMS (2 x 500W RMS)
Amplifier class	Built-in Class D
Maximum output	105 dB
Variable low pass filter	40 Hz – 140 Hz, LFE
Low level signal inputs	RCA phono sockets, Speaker level inputs
Power requirements	100 - 240 V, 50/60Hz
Power consumption	1000W
Dimensions	H246 x W256 x D248 mm (9.68 x 10.07 x 9.76 in.)/piece
Product weight	14kg (30.9 lbs.)/piece

LOGISTIC SPECIFICATION

Packaging dimensions	H385 x W400 x D380 mm (15.2 x 15.7 x 15 in.)/piece
Gross weight	15 kg (33 lbs.)/piece
Warranty period	2 years electronics, 5 years drivers
Finishes	a. Mineral White      b. Carbon Black      c. Titanium Grey
Item no.	SP3949AA      SP3949BA      SP3949HA
UPC	637203217838      637203218033      637203049118

Kube 15 MIE

15-inch front-firing active subwoofer



MSRP

1.299€/piece

PRODUCT FEATURES

- The largest model in the Kube range with the highest output
- Music Integrity Engine® (MIE) – KEF's in-house DSP – optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

Key technologies

MIE

PRODUCT SPECIFICATION

Design	Powered Subwoofer (Sealed)
Drive units	L F: 1 x 380mm (15in.)
Frequency response	20Hz - 140Hz (±3dB)
Amplifier power	300W RMS
Amplifier class	Class-D
Maximum output	116 dB
Variable low pass filter	40 Hz - 140 Hz, LFE
Inputs	RCA phono sockets, Speaker level inputs, Expansion port for KW1
Power requirements	100-240 V, 50/60 Hz
Power consumption	300 VA
Dimensions	H519 x W500 x D515 mm (20.4 x 19.7 x 20.3 in.)/piece
Product weight	27.5 kg (60.6 lbs.)/piece

LOGISTIC SPECIFICATION

Packaging dimensions	H630 x W625 x D605 mm (24.8 x 24.6 x 23.8 in.)/piece
Gross weight	34.3 kg (75.6 lbs.)/piece
Warranty period	2 years electronics, 5 years drivers
Item no.	SP4102BOBA
UPC	637203050206

Kube 12 MIE

12-inch front-firing active subwoofer



MSRP

899€/piece

PRODUCT FEATURES

- The second large model in the Kube range
- Music Integrity Engine® (MIE) – KEF's in-house DSP – optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

Key technologies

MIE

PRODUCT SPECIFICATION

Design	Powered Subwoofer (Sealed)
Drive units	L F: 1 x 300mm (12in.)
Frequency response	22Hz - 140Hz (±3dB)
Amplifier power	300W RMS
Amplifier class	Class-D
Maximum output	114 dB
Variable low pass filter	40 Hz - 140 Hz, LFE
Input	RCA phono sockets, Speaker level inputs, Expansion port for KW1
Power requirements	100-240 V, 50/60 Hz
Power consumption	300 VA
Dimensions	H410 x 393 x 410 mm (16.1 x 15.5 x 16.1 in.)/piece
Product weight	18.6 kg (41 lbs.)/piece

LOGISTIC SPECIFICATION

Packaging dimensions	H530 x W535 x D480 mm (20.9 x 21.1 x 18.9 in.)/piece
Gross weight	21.8 kg (48.1 lbs.)/piece
Warranty period	2 years electronics, 5 years drivers
Item no.	SP4075BOBA
UPC	637203050411

Kube 10 MIE

10-inch front-firing active subwoofer



MSRP

799€/piece

PRODUCT FEATURES

- The mid-sized model in the Kube range
- Music Integrity Engine® (MIE) – KEF's in-house DSP – optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

Key technologies

MIE

PRODUCT SPECIFICATION

Design	Powered Subwoofer (Sealed)
Drive units	L F: 1 x 250mm (10in.)
Frequency response	24Hz - 140Hz (±3dB)
Amplifier power	300W RMS
Amplifier class	Class-D
Maximum output	111 dB
Variable low pass filter	40Hz - 140Hz, LFE
Input	RCA phono sockets, Speaker level inputs, Expansion port for KW1
Power requirements	100-240 V, 50/60 Hz
Power consumption	300 VA
Dimensions	H370 x W353 x D370 mm (14.6 x 13.9 x 14.6 in.)/piece
Product weight	15.4 kg (34 lbs.)/piece

LOGISTIC SPECIFICATION

Packaging dimensions	H495 x W495 x D440 mm (19.5 x 19.5 x 17.3 in.)/piece
Gross weight	18.3 kg (40.3 lbs.)/piece
Warranty period	2 years electronics, 5 years drivers
Item no.	SP4074BOBA
UPC	637203050343

# Kube 8 MIE

8-inch front-firing active subwoofer



MSRP  
**649€/piece**

## PRODUCT FEATURES

- The most compact model in the Kube range
- Music Integrity Engine® (MIE) – KEF's in-house DSP – optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

**Key technologies** MIE

## PRODUCT SPECIFICATION

<b>Design</b>	Powered Subwoofer (Sealed)
<b>Drive units</b>	1 x 200 mm (8 in.)
<b>Frequency response</b>	34 Hz - 140 Hz (-6dB)
<b>Amplifier power</b>	300W RMS
<b>Amplifier class</b>	Class-D
<b>Maximum output</b>	105 dB
<b>Variable low pass filter</b>	40 Hz - 140 Hz, LFE
<b>Input</b>	RCA phono sockets, Speaker level inputs, Expansion port for KW1
<b>Power requirements</b>	100-240 V, 50/60 Hz
<b>Power consumption</b>	300 VA
<b>Dimensions</b>	H293 x W293 x D310 mm (11.5 x 11.5 x 12.2 in.)/piece
<b>Product weight</b>	9.4 kg (20.7 lbs.)/piece

## LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H415 x W410 x D380 mm (16.3 x 16.1 x 15 in.)/piece
<b>Gross weight</b>	11.7 kg (25.8 lbs.)/piece
<b>Warranty period</b>	2 years electronics, 5 years drivers
<b>Item no.</b>	SP4073B0BA
<b>UPC</b>	637203050275

# Accessories

## KW1

Wireless Subwoofer Adapter Kit



MSRP  
**229€/set, 129€/receiver only**

## PRODUCT SPECIFICATION

<b>Radio frequency</b>	5.2GHz and 5.8GHz
<b>Sampling rate</b>	24bit, 48KHz
<b>Latency</b>	<17ms
<b>Link distance</b>	Max 100 ft (Line of sight)
<b>Frequency response</b>	10 Hz - 20 kHz
<b>Signal-to-noise ratio</b>	>80 dB
<b>Transmitter power Input</b>	5V DC 1A
<b>Audio output level</b>	2 V
<b>Transmitter input level</b>	2 V
<b>Total harmonic distortion</b>	typ.-90 dB
<b>Radio frequency output power</b>	5150-5250MHz<=2 dBm 5725-5850MHz<=7 dBm
<b>Dimensions</b>	Transmitter: H214 x W72 x D79.5mm (0.8 x 2.8 x 3.1 in.)/piece Receiver: H27 x W37 x D72mm (1.1 x 1.5 x 2.8 in.)/piece

## LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H80 x W165 x D125 mm (3.1 x 6.5 x 4.9 in.)/set
<b>Gross weight</b>	0.33 kg (0.73 lbs.)/set
<b>Warranty period</b>	2 years
<b>HS code</b>	85255000(00)
<b>Item no.</b>	SP4020BA
<b>UPC</b>	637203046650

## KSK92

Subwoofer Stacking Kit



MSRP  
**220€/set**

## PRODUCT SPECIFICATION

<b>Dimensions</b>	Frame: H360 x W15 x D10mm (14.2 x 0.6 x 0.4 in.)/ frame Soft material layer: H310 x W262mm (12.2 x 10.3 in.)/ piece
<b>Product weight</b>	0.41kg (0.9lbs.)/pair

## LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H25 x W404 x D267 mm (1 x 15.9 x 10.5 in.)/pair
<b>Gross weight</b>	0.67 kg (1.5 lbs.)/pair
<b>Warranty period</b>	2 years
<b>HS code</b>	94032080(00)
<b>Item no.</b>	SP4108B0AA
<b>UPC</b>	637203051074



# Architectural Speakers & Accessories



# Extreme Home Theatre

## Bring the Theatre Home



Setting a new standard for architectural speakers, KEF's Extreme Home Theatre pushes the boundaries of technology to bring you best-in-class acoustic performance, impeccable design and easy installation too. Hundreds of performance and quality assurance tests have been undertaken to be THX® Certified Dominus and THX® Certified Ultra, proof of the system's ability to deliver breathtakingly realistic, completely immersive, cinematic sound, just as the director intended.

### Key Features

- KEF + THX Testing Lab collaboration: officially certified theatre specifications
- KEF signature Uni-Q technology, offering an open and wide soundstage
- Easy to install with expert finishing and ingenious build quality, ensuring epic performance
- Can be configured vertically or horizontally to suit your needs
- Magnetic grilles included; fabric grilles sold separately for select models

## Ci-Reference Series

### Ci5160REFM-THX

KEF's first THX® Certified Dominus speaker

THX® CERTIFIED DOMINUS



MSRP  
11.000€/piece

#### PRODUCT SPECIFICATION

Drive Units	Uni-Q driver array HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5.25 in.) Uni-Q Bass units LF: 4 x 160 mm (6.5 in.)
Amplifier requirements	50-500 W
Sensitivity	92dB
Impedance	4Ω
Rough-in frame	RIF5160L
Certification	THX Certified Dominus
Dimensions	H1070 x W230 x D105.7 mm (42.13 x 9.06 x 4.16 in.) /piece
Cut-out dimensions	H1052 x W209 mm (41.42 x 8.23 in.)
Mounting depth from surface	99 mm (3.9 in.)
Product weight	21.7 kg (47.8 lbs.)



Designed,  
Engineered, and  
handcrafted in  
Maidstone, UK

#### LOGISTIC SPECIFICATION

Packaging dimensions	H357 x W1181 x D236 mm (14.06 x 46.50 x 9.29 in.) /piece
Gross weight	24.2 kg (53.4 lbs.) /piece
Warranty period	5 years
Item no	SP4070B0AA
UPC	637203049927

### Ci3160REFM-THX

THX® Certified Ultra Speaker with MAT™

THX® CERTIFIED ULTRA



MSRP  
8.000€/piece

#### PRODUCT SPECIFICATION

Drive Units	Uni-Q driver array HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5.25 in.) Uni-Q Bass units LF: 2 x 160 mm (6.5 in.)
Amplifier requirements	50-350W
Sensitivity	89 dB
Impedance	4Ω
Rough-in frame	RIF3160L
Certification	THX Certified Ultra
Dimensions	H680 x W230 x D105.7 mm (26.77 x 9.06 x 4.16 in.) /piece
Cut-out dimensions	H660 x W209 mm (25.98 x 8.23 in.)
Mounting depth from surface	99 mm (3.9 in.)
Product weight	13.6 kg (29.92 lbs.)



Designed,  
Engineered, and  
handcrafted in  
Maidstone, UK

#### LOGISTIC SPECIFICATION

Packaging dimensions	H233 x W805 x D326 mm (9.17 x 31.69 x 12.83 in.) /piece
Gross weight	15.1 kg (33.3 lbs.) /piece
Warranty period	5 years
Item no	SP4069B0AA
UPC	637203049910

Ci-R Series

Ci5160RLM-THX

Ultra-high performance architectural speaker with MAT™



MSRP  
3.000€/piece

PRODUCT SPECIFICATION	
Drive units	Uni-Q driver array HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 160 mm (6.5 in.) Uni-Q Bass units LF: 4 x 160 mm (6.5 in.)
Amplifier requirements	50-350 W
Sensitivity	89 dB
Impedance	4 Ω
Rough-in frame	RIF5160L
Certification	THX Certified Ultra
Dimensions	H1070 x W230 x D105.7 mm (42.13 x 9.06 x 4.16in.)/piece
Cut-out dimensions	H1052 x W209mm (41.42 x 8.23 in.)
Mounting depth from surface	99 mm (3.9 in.)
Product weight	18.7 kg (41.1 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H353 x W1178 x D236 mm (13.90 x 46.38 x 9.29 in.)/piece
Gross weight	21.2 kg (46.7 lbs.)/piece
Warranty period	5 years
Item no.	SP4079G0AA
UPC	637203218811

Ci3160RLM-THX

THX® Certified Ultra Speaker with MAT™



MSRP  
2.000€/piece

PRODUCT SPECIFICATION	
Drive units	Uni-Q driver array HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5.25 in.) Uni-Q Bass units LF: 2 x 160 mm (6.5 in.)
Amplifier requirements	50-350 W
Sensitivity	89 dB
Impedance	4 Ω
Rough-in frame	RIF3160L
Certification	THX Certified Ultra
Dimensions	H680 x W230 x D105.7 mm (26.77 x 9.06 x 4.16in.)/piece
Cut-out dimensions	H660 x W209 mm (25.98 x 8.23 in.)
Mounting depth from surface	99 mm (3.9 in.) /piece
Product weight	12 kg (26.4 lbs.) /piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H322 x W768 x D227 mm (12.68 x 30.24 x 8.94 in.)/piece
Gross weight	13.4 kg (29.5 lbs.)/piece
Warranty period	5 years
Item no.	SP4078G0AA
UPC	637203218804

Ci250RRM-THX

KEF's First Architectural Speaker with MAT™



MSRP  
1.700€/piece

PRODUCT SPECIFICATION	
Drive units	Uni-Q driver array HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4 in.) Uni-Q Bass units LF: 250 mm (10 in.)
Amplifier requirements	50-250 W
Sensitivity	89 dB
Impedance	8 Ω
Certification	THX Certified Ultra, IP64
Dimensions	Ø346 x D175 mm (13.62 x 6.89 in.)/piece
Cut-out dimensions	Ø300 mm (11.81 in.)
Mounting depth from surface	168 mm (6.62 in.)
Product weight	6 kg (13.2 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H422 x W420 x D277 mm (16.61 x 16.54 x 10.91 in.) /piece
Gross weight	8.1 kg (17.9 lbs.) /piece
Warranty period	5 years
Item no.	SP4023AA
UPC	637203218392

Ci200RR-THX

Features KEF's patented Uni-Q driver array



MSRP  
759€/piece

PRODUCT SPECIFICATION	
Drive units	Uni-Q driver array HF: 38 mm (1.5 in.) Bass units LF: 200 mm (8 in.) Uni-Q
Amplifier requirements	10-190 W
Sensitivity	90 dB
Impedance	4 Ω
Rough-in frame	RIF200R
Rear enclosure	RNC200R
Certification	THX Certified Ultra, IP64
Dimensions	Ø290 x D132.6 mm (11.42 x 5.22 in.)/piece
Cut-out dimensions	Ø238 mm (9.37 in.)
Mounting depth from surface	126.5 mm (4.98 in.)
Product weight	3.6 kg (7.94 lbs.) /piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H362 x W357 x D222mm (14.25 x 14.06 x 8.74 in.) /piece
Gross weight	4.4 kg (9.7 lbs.) /piece
Warranty period	5 years
Item no.	SP3836AA
UPC	637203211430

## Ci200RS-THX

THX® CERTIFIED ULTRA

Features KEF's patented  
Uni-Q driver array



MSRP  
**759€/piece**

### PRODUCT SPECIFICATION

Drive units	Uni-Q driver array HF: 38 mm (1.5in.) Bass units LF: 200 mm (8in.) Uni-Q
Amplifier requirements	10-190 W
Sensitivity	90 dB
Impedance	4 Ω
Rough-in frame	RIF200S
Rear enclosure	RNC200S
Certification	THX Certified Ultra, IP64
Dimensions	H273 x W273 x D132.6 mm (10.75 x 10.75 x 5.22 in.) /piece
Cut-out dimensions	H240 x W240 mm (9.45 x 9.45 in.)
Mounting depth from surface	127mm (5 in.)
Product weight	3.6 kg (7.94 lbs.) /piece

### LOGISTIC SPECIFICATION

Packaging dimensions	H362 x W357 x D222 mm (14.25 x 14.06 x 8.74 in.) /piece
Gross weight	4.5 kg (9.9 lbs.) /piece
Warranty period	5 years
Item no.	SP3927AA
UPC	637203215520

## Ci160RR-THX

THX® CERTIFIED ULTRA

THX® Certified Ultra  
Architectural Speaker



MSRP  
**649€/piece**

### PRODUCT SPECIFICATION

Drive units	Uni-Q driver array HF: 25 mm (1 in.) Bass units LF: 165 mm (6.5 in.) Uni-Q
Amplifier requirements	10-150 W
Sensitivity	89 dB
Impedance	4 Ω
Rough-in frame	RIF160R
Rear enclosure	RNC160R
Certification	THX Certified Ultra, IP64
Dimensions	Ø234.6 mm x D115 mm (9.24 in. x 4.53 in.) /piece
Cut-out dimensions	Ø196 mm (7.71 in.)
Mounting depth from surface	110 mm (4.33 in.)
Product weight	2.94 kg (6.48 lbs.) /piece

### LOGISTIC SPECIFICATION

Packaging dimensions	H314 x W308 x D187 mm (12.36 x 12.13 x 7.36 in.) /piece
Gross weight	3.5 kg (7.7 lbs.) /piece
Warranty period	5 years
Item no.	SP4021AA
UPC	637203217654

## Ci-Q Series

### Ci4100QL-THX

THX® CERTIFIED SELECT

Features KEF's patented  
Uni-Q driver array



MSRP  
**549€/piece**

### PRODUCT SPECIFICATION

Drive units	HF: 19 mm (0.75 in.) Uni-Q MF: 100 mm (4 in.) LF: 3 x 100 mm (4 in.)
Amplifier requirements	10 - 150 W
Sensitivity	89 dB
Impedance	4 Ω
Rough-in frame	RIF4100L
Certification	THX Certified Select, IP64
Dimensions	H490 x W128 x D81 mm (19.29 x 5.04 x 3.19 in.) /piece
Cut-out dimensions	H476 x W114 mm (18.74 x 4.49 in.)
Mounting depth from surface	76 mm (3.0 in.)
Product weight	3 kg (6.61 lbs.) /piece

### LOGISTIC SPECIFICATION

Packaging dimensions	H191 x W558 x D117 mm (7.52 x 21.97 x 4.61 in.) /piece
Gross weight	3.8 kg (8.4 lbs.) /piece
Warranty period	5 years
Item no.	SP3831AA
UPC	637203211164

## Accessories

### Cloth Grille

for Ci5160REFM-THX &  
Ci5160RLM-THX



MSRP  
**159€/piece**

### PRODUCT SPECIFICATION

Dimensions	H1044 x W204 x D7 mm (41.1 x 8 x 0.3 in.) /piece
Product weight	0.37 kg (0.8 lbs.) /piece

### LOGISTIC SPECIFICATION

Packaging dimensions	H30 x W1060 x D223 mm (1.2 x 41.7 x 8.8 in.) /piece
Gross weight	0.9 kg (2 lbs.) /piece
Warranty period	2 years
Item no.	SP3854BB
UPC	637203212109

### Cloth Grille

for Ci3160REFM-THX &  
Ci3160RLM-THX



MSRP  
**119€/piece**

### PRODUCT SPECIFICATION

Dimensions	H654 x W204 x D7 mm (25.7 x 8 x 0.3 in.) /piece
Product weight	0.3 kg (0.7 lbs.) /piece

### LOGISTIC SPECIFICATION

Packaging dimensions	H30 x W673 x D223 mm (1.2 x 26.5 x 8.8 in.) /piece
Gross weight	0.6 kg (1.3 lbs.) /piece
Warranty period	2 years
Item no.	SP3852BB
UPC	637203212093

# In-Ceiling & In-Wall Speakers

Designed to disappear into your environment



KEF's comprehensive collection of in-ceiling and in-wall architectural speakers offer exceptional performance from models designed to disappear into their environment. Whether you require the class defining abilities or the space saving features, KEF has the perfect speaker for your installation.

Key Features	<ul style="list-style-type: none"><li>■ Ultra-thin bezel design, magnetic paintable grille</li><li>■ Weather resistant, IP64 certified</li><li>■ Fast and easy to install. KEF engineering approved build quality</li></ul>

## Ci-Q Series

### Ci200QL

Features KEF's patented Uni-Q driver array



MSRP  
489€/piece

PRODUCT SPECIFICATION	
Drive Units	HF: 25mm (1 in.) LF: 200mm (8 in.) Uni-Q
Amplifier requirements	10-150 W
Sensitivity	90 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF200L
Rear enclosure	RNC200L
Certification	IP64
Dimensions	H369 x W273 x D106 mm (14.53 x 10.75 x 4.27 in.)/piece
Cut-out dimensions	H334 x W238 mm (13.15 x 9.37 in.)
Mounting depth from surface	99.8 mm (3.93 in.)
Product weight	2.6 kg (5.77 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H145 x W509 x D355 mm (5.7 x 20 x 14 in.)/piece
Gross weight	3.3 kg (7.3 lbs.)/piece
Warranty period	5 years
Item no	SP3777AA
UPC	637203208621

### Ci160QL

Features KEF's patented Uni-Q driver array



MSRP  
359€/piece

PRODUCT SPECIFICATION	
Drive Units	HF: 19 mm (0.75 in.) LF: 160 mm (6.5 in.) Uni-Q
Amplifier requirements	10 - 125 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF160L
Rear enclosure	RNC160L
Certification	IP64
Dimensions	H303 x W223 x D97.5 mm (11.93 x 8.78 x 3.84 in.)/piece
Cut-out dimensions	H274 x 194 mm (10.79 x 7.64 in.)
Mounting depth from surface	91 mm (3.58 in.)
Product weight	2.05 kg (4.51 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W382 x D284 mm (5.5 x 15 x 11.2 in.)/piece
Gross weight	2.7 kg (6 lbs.)/piece
Warranty period	5 years
Item no	SP3775AA
UPC	637203208539



### Ci200QS

Features KEF's patented  
Uni-Q driver array



MSRP  
**469€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 25 mm (1 in.) Uni-Q LF: 200 mm (8 in.)
Amplifier requirements	10-150 W
Sensitivity	90 dB (2.83V/1 m)
Impedance	8Ω
Rough-in frame	RIF200S
Rear enclosure	RNC200S
Certification	IP64
Dimensions	H273 x W273 x D106 mm (10.75 x 10.75 x 4.17 in.)/piece
Cut-out dimensions	H238 x W238 mm (9.37 x 9.37 in.)
Mounting depth from surface	99.8 mm (3.93 in.)
Product weight	2.4 kg (5.3 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H145 x W415 x D355 mm (5.7 x 16.3 x 14 in.)/piece
Gross weight	31 kg (6.8 lbs.)/piece
Warranty period	5 years
Item no	SP3773AA
UPC	637203208614

### Ci160QS

Features KEF's patented  
Uni-Q driver array



MSRP  
**329€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 19 mm (0.75 in.) Uni-Q LF: 160 mm (6.5 in.)
Amplifier requirements	10-125 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF160S
Rear enclosure	RNC160S
Certification	IP64
Dimensions	H223 x W223 x D97 mm (8.78 x 8.78 x 3.82 in.)/piece
Cut-out dimensions	194 x 194 mm (7.64 x 7.64 in.)
Mounting depth from surface	91 mm (3.58 in.)
Product weight	1.88 kg (4.14 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W302 x D284 mm (5.5 x 11.9 x 11.2 in.)/piece
Gross weight	2.4 kg (5.3 lbs.)/piece
Warranty period	5 years
Item no	SP3771AA
UPC	637203208515

### Ci130QS

Features KEF's patented  
Uni-Q driver array



MSRP  
**269€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 19 mm (0.75 in.) LF: 130 mm (5.25 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	87 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF130S
Rear enclosure	RNC130S
Certification	IP64
Dimensions	H184 x 184 x 84 mm (7.24 x 7.24 x 3.26 in.)/piece
Cut-out dimensions	H158 x W158 mm (6.22 x 6.22 in.)
Mounting depth from surface	77.9 mm (3.07 in.)
Product weight	1.4 kg (3.1 lbs.) /piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W275 x D255 mm (5.5 x 10.8 x 10 in.)/piece
Gross weight	1.8 kg (4 lbs.)/piece
Warranty period	5 years
Item no	SP3768AA
UPC	637203208706

### Ci200QR

Thin bezel and narrow rim  
allow for flawless integration



MSRP  
**469€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 25 mm (1 in.) LF: 200 mm (8.0 in.) Uni-Q
Amplifier requirements	10-150 W
Sensitivity	90 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF200R
Rear enclosure	RNC200R
Certification	IP64
Dimensions	Ø289.6 x D109.8 mm (11.4 x 4.33 in.) /piece
Cut-out dimensions	Ø240 mm (9.45 in.)
Mounting depth from surface	103.3 mm (4.07 in.)
Product weight	2.4 kg (5.28 lbs.) /piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H145 x W353 x D353 mm (5.7 x 13.9 x 13.9 in.)/piece
Gross weight	3.2 kg (7.1 lbs.)/piece
Warranty period	5 years
Item no	SP3734AA
UPC	637203207488

Ci160QR

Features KEF's patented  
Uni-Q driver array



MSRP 329€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 19mm (0.75 in.) LF: 160mm (6.5 in.) Uni-Q
Amplifier requirements	10-125 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8 Ω
Rough-in frame	R1F160R
Rear enclosure	RNC160R
Certification	IP64
Dimensions	Ø234.6 x D98 mm (9.24 x 3.86 in.)/piece
Cut-out dimensions	Ø196 mm (7.71 in.)
Mounting depth from surface	91 mm (3.58 in.)
Product weight	2.05 kg (4.51 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W285 x D285 mm (5.5 x 11.2 x 11.2 in.)/piece
Gross weight	2.3 kg (5.1 lbs.)/piece
Warranty period	5 years
Item no	SP3733AA
UPC	637203207204

Ci130QR

Features KEF's patented  
Uni-Q driver array



MSRP 269€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 19 mm (0.75 in.) LF: 130 mm (5.25 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	87 dB (2.83V/1m)
Impedance	8 Ω
Rough-in frame	R1F130R
Rear enclosure	RNC130R
Certification	IP64
Dimensions	Ø193.4 x D83mm (7.61 x 3.28 in.)/piece
Cut-out dimensions	158 mm (6.22 in.)
Mounting depth from surface	77.8 mm (3.06 in.)
Product weight	1.35 kg (2.97 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H137 x W259 x D258 mm (5.4 x 10.2 x 10.2 in.)/piece
Gross weight	1.8 kg (4 lbs.)/piece
Warranty period	5 years
Item no	SP3732AA
UPC	637203207464

Ci-C Series

Ci160.2CL

Features KEF's patented  
Uni-Q driver array



MSRP 269€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 160 mm (6.5 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	89 dB (2.83 V/ 1 m)
Impedance	8Ω
Rough-in frame	R1F160L
Rear enclosure	RNC160L
Certification	IP64
Dimensions	H303 x W223 x D 68.7 mm (11.93 x 8.78 x 3.49 in.)/piece
Cut-out dimensions	H274 x W194 mm (10.79 x 7.64 in.)
Mounting depth from surface	84.5 mm (3.33in.)
Product weight	1.6 kg (3.5 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W382 x D284 mm (5.5 x 15 x 11.2 in.)/piece
Gross weight	2.2 kg (4.9 lbs.)/piece
Warranty period	5 years
Item no	SP3933AA
UPC	637203215407

Ci160.2CS

Features KEF's patented  
Uni-Q driver array



MSRP 249€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 16mm (0.6 in.) LF: 160mm (6.5 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8 Ω
Rough-in frame	R1F160S
Rear enclosure	RNC160S
Certification	IP64
Dimensions	H223 x W223 x D68.7 mm (8.78 x 8.78 x 3.49 in.)/piece
Cut-out dimensions	H194 x W194mm (7.64 x 7.64in.)
Mounting depth from surface	84.5 mm (3.33 in.)
Product weight	1.5 kg (3.3 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W302 x D284 mm (5.5 x 11.9 x 11.2 in.)/piece
Gross weight	2 kg (4.4 lbs.)/piece
Warranty period	5 years
Item no	SP3934AA
UPC	637203215421

### Ci130.2CS

Features KEF's patented  
Uni-Q driver array



MSRP  
**219€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
Amplifier requirements	10-80 W
Sensitivity	87 dB (2.83 V/1 m)
Impedance	8 Ω
Rough-in frame	RIF130S
Rear enclosure	RNC130S
Certification	IP64
Dimensions	H184 x W184 x D81 mm (7.24 x 7.24 x 3.19 in.)/piece
Cut-out dimensions	H158 x W158 mm (6.22 x 6.22 in.)
Mounting depth from surface	77.1 mm (3.03 in.)
Product weight	1.2 kg (2.7 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W275 x D255 mm (5.5 x 10.8 x 10 in.)/piece
Gross weight	1.6 kg (3.5 lbs.)/piece
Warranty period	5 years
Item no	SP3935AA
UPC	637203215445

### Ci200.2CR

Features KEF's patented  
Uni-Q driver array



MSRP  
**359€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 200 mm (8 in.) Uni-Q
Amplifier requirements	10-125 W
Sensitivity	90 dB (2.83 V/1 m)
Impedance	8 Ω
Rough-in frame	RIF200R
Rear enclosure	RNC200R
Certification	IP64
Dimensions	Ø289.6 mm x D103.3 mm (11.4 x 4.07 in.)/piece
Cut-out dimensions	Ø240 mm (9.45 in.)
Mounting depth from surface	97.2 mm (3.83 in.)
Product weight	1.7 kg (3.7 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H145x W353 xD353 mm (5.7x13.9x13.9 in.)/piece
Gross weight	2.4 kg (5.3 lbs.)/piece
Warranty period	5 years
Item no	SP3936AA
UPC	637203215469

### Ci160.2CR

Features KEF's patented  
Uni-Q driver array



MSRP  
**249€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 160 mm (6.5 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8 Ω
Rough-in frame	RIF160R
Rear enclosure	RNC160R
Certification	IP64
Dimensions	Ø234.6 mm x D88.7 mm (9.24 x 3.49 in.)/piece
Cut-out dimensions	Ø196 mm (7.71 in.)
Mounting depth from surface	84.5 mm (3.33 in.)
Product weight	1.4 kg (3.1 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H139 x W284 x D284 mm (5.5 x 11.2 x 11.2 in.)/piece
Gross weight	1.9 kg (4.2 lbs.)/piece
Warranty period	5 years
Item no	SP3937AA
UPC	637203215483

### Ci130.2CR

Features KEF's patented  
Uni-Q driver array



MSRP  
**219€/piece**

PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
Amplifier requirements	10-80 W
Sensitivity	87 dB (2.83 V/1 m)
Impedance	8 Ω
Rough-in frame	RIF130R
Rear enclosure	RNC130R
Certification	IP64
Dimensions	Ø193.4 mm x D82.3 mm (7.61 x 3.24 in.)/piece
Cut-out dimensions	Ø158 mm (6.22 in.)
Mounting depth from surface	77.7 mm (3.06 in.)
Product weight	1.3 kg (2.8 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H137 x W255 x D255 mm (5.4 x 10 x 10 in.)/piece
Gross weight	1.8 kg (4 lbs.)/piece
Warranty period	5 years
Item no	SP3938AA
UPC	637203215506

Ci-E Series

Ci160ES

Unprecedented value and performance



MSRP 169€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 160 mm (6.5 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF160S
Rear enclosure	RNC160S
Certification	IP64
Dimensions	H223 x W223 x D88.7 mm (8.78 x 8.78 x 3.49 in.)/piece
Cut-out dimensions	H194 x W194 mm (7.64 x 7.64 in.)
Mounting depth from surface	85.2 mm (3.35 in.)
Product weight	1.4 kg (3.1 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H286 x W281 x D276 mm (11.3 x 11.1 x 10.9 in.)/pair
Gross weight	3.6 kg (7.9 lbs.)/pair
Warranty period	5 years
Item no	SP4038AA
UPC	637203218149

Ci200ER

Heard but not seen, with unprecedented value and performance.



MSRP 219€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 200 mm (8 in.) Uni-Q
Amplifier requirements	10-125 W
Sensitivity	90 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF200R
Rear enclosure	RNC200R
Certification	IP64
Dimensions	Ø289.6 mm x D103.3 mm (11.4 x 4.07 in.)/piece
Cut-out dimensions	Ø240 mm (9.45 in.)
Mounting depth from surface	97.2 mm (3.83 in.)
Product weight	1.6 kg (3.6 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H343 x W319 x D334 mm (13.5 x 12.6 x 13.1 in.)/pair
Gross weight	3.9 kg (8.6 lbs.)/pair
Warranty period	5 years
Item no	SP3910AA
UPC	637203213472

Ci160ER

Unprecedented value and performance



MSRP 169/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 16mm (0.6 in.) LF: 160mm (6.5 in.) Uni-Q
Amplifier requirements	10-100 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF160R
Rear enclosure	RNC160R
Certification	IP64
Dimensions	Ø234.6 x D88.7 mm (9.24 x 3.49 in.)/piece
Cut-out dimensions	Ø196 mm (7.71 in.)
Mounting depth from surface	85.2 mm (3.35 in.)
Product weight	1.4 kg (3.1 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H286 x W281 x D276 mm (11.3 x 11.1 x 10.9 in.)/pair
Gross weight	3.3 kg (7.3 lbs.)/pair
Warranty period	5 years
Item no	SP3909AA
UPC	637203213458

Ci130ER

Unprecedented value and performance



MSRP 139€/piece	
PRODUCT SPECIFICATION	
Drive Units	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
Amplifier requirements	10-80 W
Sensitivity	90 dB (2.83 V/1 m)
Impedance	8Ω
Rough-in frame	RIF130R
Rear enclosure	RNC130R
Certification	IP64
Dimensions	Ø193.4 mm x D81 mm (7.61 x 3.19 in.)/piece
Cut-out dimensions	Ø158 mm (6.22 in.)
Mounting depth from surface	77.5 mm (3.05 in.)
Product weight	1.2 kg (2.7 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H248 x W261 x D241 mm (9.8 x 10.3 x 9.5 in.)/pair
Gross weight	2.7 kg (6 lbs.)/pair
Warranty period	5 years
Item no	SP3908AA
UPC	637203213434

# Special Applications



With a Flush Mount, an Extremely Low Profile, Dual Stereo and Soundlight speakers, KEF's architectural speakers are designed to cater to even the most specific needs, and a wide variety of installation setups. The discreet design only serves to enhance its extremely powerful performance.

## Key Features

- Ultra-thin bezel design, magnetic paintable grille
- Fast and easy to install
- KEF engineering approved build quality

## Soundlight

### Ci100QS

Soundlight speaker



MSRP  
219€/piece

#### PRODUCT SPECIFICATION

Drive Units	HF: 19mm (0.75in.) LF: 100mm (4in.) Uni-Q
Amplifier requirements	10-50 W
Sensitivity	88 dB (2.83 V/1m)
Impedance	4Ω
Rough-in frame	RIF100S
Rear enclosure	RNC100S
Certification	IP64
Dimensions	H127 x W127 x H76 mm (5.0 x 5.0 x 2.99 in.)/piece
Cut-out dimensions	H112x W112 mm (4.41 x 4.41 in.)
Mounting depth from surface	72 mm (2.83 in.)
Product weight	0.67kg (1.48 lbs.)/piece

#### LOGISTIC SPECIFICATION

Packaging dimensions	H114 x W173 x D173 mm (4.5 x 6.8 x 6.8 in.)/piece
Gross weight	0.9 kg (2 lbs.)/piece
Warranty period	5 years
Item no	SP3765AA
UPC	637203208966

### Ci100.2QR

Soundlight speaker



MSRP  
219€/piece

#### PRODUCT SPECIFICATION

Drive Units	HF: 16 mm (0.6 in.) LF: 75 mm (3 in.) Uni-Q
Amplifier requirements	10-50 W
Sensitivity	83 dB (2.83 V/1m)
Impedance	4Ω
Rough-in frame	RIF100R
Rear enclosure	RNC100R
Certification	IP64
Dimensions	Ø136 mm x D57 mm (5.4 x 2.2 in.)/piece
Cut-out dimensions	Ø118 mm (4.6 in.)
Mounting depth from surface	103 mm (4.1 in.)
Product weight	0.65 kg (1.44 lbs.)/piece


#### LOGISTIC SPECIFICATION

Packaging dimensions	H155 x W216 x D216 mm (6.1 x 8.5 x 8.5 in.)/piece
Gross weight	0.9 kg (2 lbs.)/piece
Warranty period	5 years
Item no	SP3928AA
UPC	637203215377

Flush Mount

Ci130QSfl


Flush Mount Speaker

	<b>MSRP</b> <b>469€/piece</b>	
	<b>PRODUCT SPECIFICATION</b>	
Drive Units	HF: 19mm (0.75 in.) LF: 130mm (5.25 in.) Uni-Q	
Amplifier requirements	10-100 W	
Sensitivity	87 dB (2.83 V/1 m)	
Impedance	8 Ω	
Certification	IP64	
Dimensions	H200.5 x W200.5 x D103.6 mm (7.9 x 7.9 x 4.08 in.)/piece	
Cut-out dimensions	H158 x W158 mm (6.22 x 6.22 in.)	
Mounting depth from surface	101 mm (3.98 in.)	
Product weight	1.6 kg (3.53 lbs.)/piece	

<b>LOGISTIC SPECIFICATION</b>	
Packaging dimensions	H157 x W252 x D250 mm (6.2 x 9.9 x 9.8 in.)/piece
Gross weight	1.9 kg (4.2 lbs.)/piece
Warranty period	5 years
Item no	SP4019AA
UPC	637203217647

Ci130QRfl

Flush Mount Speaker


	<b>MSRP</b> <b>469€/piece</b>	
	<b>PRODUCT SPECIFICATION</b>	
Drive Units	HF: 19 mm (0.75 in.) LF: 130 mm (5.25 in.) Uni-Q	
Amplifier requirements	10-100 W	
Sensitivity	87 dB (2.83 V/1 m)	
Impedance	8 Ω	
Certification	IP64	
Dimensions	Ø200.6 mm x D104.6 mm (7.9 x 4.12 in.)/piece	
Cut-out dimensions	Ø158 mm (6.22 in.)	
Mounting depth from surface	101 mm (3.98 in.)	
Product weight	1.45 kg (3.19 lbs.)/piece	

<b>LOGISTIC SPECIFICATION</b>	
Packaging dimensions	H157 x W252 x D250 mm (6.2 x 9.9 x 9.8 in.)/piece
Gross weight	1.8 kg (4 lbs.)/piece
Warranty period	5 years
Item no	SP4012AA
UPC	637203217630

Dual Stereo

Ci160CSds


Dual stereo speaker

	<b>MSRP</b> <b>299€/piece</b>	
	<b>PRODUCT SPECIFICATION</b>	
Drive Units	HF: 2 x 19mm (0.75 in.) LF: 160mm (6.5 in.) Dual voice coil	
Amplifier requirements	10-80W	
Sensitivity	91 dB (2.83V/1m)	
Impedance	8Ω	
Rough-in frame	RiF160S	
Rear enclosure	RNC160S	
Certification	IP64	
Dimensions	H223 x W223 x D90.5mm (8.78 x 8.78 x 3.56 in.)/piece	
Cut-out dimensions	H194 x W194 mm (7.64 x 7.64 in.)	
Mounting depth from surface	84.5 mm (3.33 in.)	
Product weight	1.8 kg (4 lbs.)/piece	

<b>LOGISTIC SPECIFICATION</b>	
Packaging dimensions	H139 x W302 x D284 mm (5.5 x 11.9 x 11.2 in.)/piece
Gross weight	2.3 kg (5.1 lbs.)/piece
Warranty period	5 years
Item no	SP3769AA
UPC	637203208768

Ci160CRds

Dual stereo speaker

	<b>MSRP</b> <b>299€/piece</b>	
	<b>PRODUCT SPECIFICATION</b>	
Drive Units	HF: 2 x 19mm (0.75 in.) LF: 160mm (6.5 in.) Dual voice coil	
Amplifier requirements	10-80W	
Sensitivity	91 dB (2.83 V/1 m)	
Impedance	8 Ω	
Rough-in frame	RiF160R	
Rear enclosure	RNC160R	
Certification	IP64	
Dimensions	Ø234.6 mm x D93 mm (9.24 x 3.66 in.)/piece	
Cut-out dimensions	Ø196 mm (7.71 in.)	
Mounting depth from surface	86 mm (3.36 in.)	
Product weight	1.80 kg (4.0 lbs.)/piece	


<b>LOGISTIC SPECIFICATION</b>	
Packaging dimensions	H139 x W285 x D284 mm (5.5 x 11.2 x 11.2 in.)/piece
Gross weight	2.2 kg (4.9 lbs.)/piece
Warranty period	5 years
Item no	SP3687AA
UPC	637203207181



Extremely Low Profile


Ci160TS

Extremely Low Profile speaker

	MSRP 359€/piece	
	PRODUCT SPECIFICATION	
	Drive Units	HF: 25 mm (1 in.) LF: 115 mm (4.5 in.) Dual layer
	Amplifier requirements	10-100W
	Sensitivity	87 dB (2.83V/1m)
	Impedance	8Ω
	Rough-in frame	RIF160S
	Certification	IP64
	Dimensions	H222.8 x W222.8 x D41mm (8.77 x 8.77 x 1.61 in.)/piece
	Cut-out dimensions	H194 x W194 mm (7.64 x 7.64 in.)
LOGISTIC SPECIFICATION		
Packaging dimensions	H84 x W284 x D284 mm (3.3 x 11.2 x 11.2 in.)/piece	
Gross weight	1.6 kg (3.5 lbs.)/piece	
Warranty period	5 years	
Item no	SP3884AA	
UPC	637203212420	

Ci160TR

Extremely Low Profile speaker

	MSRP 359€/piece	
	PRODUCT SPECIFICATION	
	Drive Units	HF: 25mm (1 in.) aluminium HF LF: 115mm (4.5 in.) dual layer MF
	Amplifier requirements	10-100W
	Sensitivity	87dB (2.83V/1m)
	Impedance	8Ω
	Rough-in frame	RIF160R
	Certification	IP64
	Dimensions	Ø234.6 mm x D40 mm (9.24 x 1.57 in.)/piece
	Cut-out dimensions	Ø196mm (7.7in.)
LOGISTIC SPECIFICATION		
Packaging dimensions	H77 x W283 x D283 mm (3 x 11.1 x 11.1 in.)/piece	
Gross weight	1.5 kg (3.3 lbs.)/piece	
Warranty period	5 years	
Item no	SP3830AA	
UPC	637203210983	

# Installed subwoofers



KEF's installed subwoofers offer incredible sonic performance whilst remaining visually discreet, and they are all engineered to partner any of KEF's architectural speaker ranges. Plus, when powered by KEF's DSP-driven KASA500 install audio system amplifier, the Ci3160RLb-THX, Ci250RRb-THX and Ci200QSb-THX subwoofers achieve the intense bass performance levels required for THX Certified Select and THX Certified Ultra (dependent on configuration).

## Ci3160RLb-THX

THX Certified Ultra in-wall subwoofer

THX® CERTIFIED ULTRA  
THX® CERTIFIED SELECT



MSRP 1.350€/piece	
PRODUCT SPECIFICATION	
Series	Ci-R Series
Drive units	LF: 3 x 160 mm (6.5 in.)
Amplifier requirements	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   2 Units required for THX Select (Subwoofer   KASA500): 2   1
Sensitivity	92 dB (2.83 V/1 m)
Impedance	4Ω
Rough-in frame	RIF3160L
Certification	THX Certified Ultra, THX Certified Select
Dimensions	H680 x W230 x D96 mm (26.77 x 9.06 x 3.78 in.)/piece
Cut-out dimensions	H660 x W209 mm (25.98 x 8.23 in.)
Mounting depth from surface	88.5 mm (3.84 in.)
Product weight	10.9 kg (24.03 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H322 x W768 x D227 mm (14.25 x 30.24 x 8.94 in.) /piece
Gross weight	12.3 kg (27.12 lbs.)/piece
Warranty period	5 years
Item no.	SP3835AA
UPC	637203211867

## Ci250RRb-THX

The extreme architectural subwoofer

THX® CERTIFIED ULTRA  
THX® CERTIFIED SELECT



MSRP 1.250€/piece	
PRODUCT SPECIFICATION	
Series	Ci-R Series
Drive units	LF: 250 mm (10 in.)
Amplifier requirements	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   1 Units required for THX Select (Subwoofer   KASA500): 2   1
Sensitivity	109 dB (2.83 V/1 m)
Impedance	4Ω
Certification	THX Certified Ultra, THX Certified Select IP64
Dimensions	Ø: 346 mm x D153 mm (113.62 x 6.0 in.)/piece
Cut-out dimensions	Ø: 300 mm (11.81 in.)
Mounting depth from surface	147 mm (5.8 in.)
Product weight	5.6 kg (12.3 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H422 x W420 x D247 mm (16.6 x 16.5 x 9.7 in.)/piece
Gross weight	6.4 kg (14.1 lbs.)/piece
Warranty period	5 years
Item no.	SP4040AA
UPC	637203218408

Ci200QSb-THX

THX Certified Ultra 200mm subwoofer

THX® CERTIFIED ULTRA  
THX® CERTIFIED SELECT



MSRP  
489€/piece

PRODUCT SPECIFICATION	
Series	Ci-Q Series
Drive units	LF: 200 mm (8 in.)
Amplifier requirements	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   2 Units required for THX Select (Subwoofer   KASA500): 2   1
Sensitivity	85 dB - Passive Mode (Crossover "ON")
Impedance	6Ω
Rough-in frame	RIF200S
Certification	THX Certified Ultra, THX Certified Select IP64
Dimensions	H273 x W273 x D106 mm (10.75 x 10.75 x 4.17 in.)/piece
Cut-out dimensions	H238 x W238 mm (9.37 x 9.37 in.)
Mounting depth from surface	101.6 mm (4 in.)
Product weight	3.3 kg (7.28 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H369 x W363 x D340 mm (14.5 x 14.3 x 13.4 in.)/piece
Gross weight	7.6 kg (16.8 lbs.)/piece
Warranty period	5 years
Mode	Passive mode                      Active mode
Item no.	SP3894AA
UPC	637203212413

Ci200TRb

The extreme architectural subwoofer



MSRP  
539€/piece

PRODUCT SPECIFICATION	
Series	Ci-T Series
Drive units	LF: 200 mm (8 in.)
Amplifier requirements	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   1 Units required for THX Select (Subwoofer   KASA500): 2   1
Sensitivity	87 dB (2.83 V/1 m)
Impedance	4Ω
Rough-in frame	RIF200R
Certification	IP64
Dimensions	Ø: 290 mm x D63 mm (11.42 x 2.48 in.)/piece
Cut-out dimensions	240 mm (9.45 in.)
Mounting depth from surface	26 mm (1.03 in.)
Product weight	1.7 kg (3.75 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H96 x W356 x D354 mm (3.8 x 14 x 13.9 in.)/piece
Gross weight	2.4 kg (5.3 lbs.)/piece
Warranty period	5 years
Mode	Passive mode                      Active mode
Item no.	SP3845AA
UPC	637203212406

Accessories

KASA500

powerful Class-D Dual 250WPC amplifier



MSRP  
1.349€/piece

PRODUCT SPECIFICATION	
Inputs	Selectable stereo RCA line level, or mono LFE RCA level; Stereo speaker level
Outputs	2 x 250 W 4 Ω Bridge 1 x 500 W 8 Ω (<1% THD)
Dimensions	H88 x W432 x D304 mm (3.5 x 17 x 12 in.)/piece
Product weight	4 kg (9 lbs.)/piece

LOGISTIC SPECIFICATION	
Packaging dimensions	H198 x W496 x D390 mm (7.8 x 19.5 x 15.4 in.)/piece
Gross weight	5.3 kg (11.7 lbs.)/piece
Warranty period	5 years
Item no.	SP3838BB
UPC	637203211133

# Outdoor



On the patio, by the pool, or on a yacht, the KEF Ventura Series outdoor speakers let you enjoy music without compromise. Engineered to IP65 standards, these rugged, hard-wearing speakers can withstand even the most extreme weather conditions.

Key Features	■ All metal design, powder coated to extremes to last and last
	■ High-quality sound that meets KEF engineering expectations
	■ Weather resistant, IP65 certified, salt spray tested for over 1200 hours
	■ All mounting hardware is included
	■ Rugged, hard-wearing speakers can withstand even most extreme weather

## Ventura 6

Outdoor Speakers



MSRP  
**599€/pair**

PRODUCT SPECIFICATION	
Drive units	HF: 25 mm (1 in.) LF: 160 mm (6.5 in.)
Amplifier requirements	10-125 W
Sensitivity	90 dB (2.83 V/1 m)
Impedance	6Ω
Operating temperature range	-40° C to 70° C (-40° F to 158° F)
Certification	IP65
Dimensions	H300 x W226 x D219 mm (11.8 x 9 x 8.6 in.)/piece
Product weight	3.8 kg (8.4 lbs.)/piece



LOGISTIC SPECIFICATION		
Packaging dimensions	H357 x W596 x D288 mm (14.1 x 23.5 x 11.3 in.)/piece	
Gross weight	8 kg (17.6 lbs.)/piece	
Warranty period	5 years	
Finishes	a. Black	b. White
Item no.	SP3676BA	SP3676AA
UPC	637203043109	637203028809

## Ventura 5

Outdoor Speakers



MSRP  
**489€/pair**

PRODUCT SPECIFICATION	
Drive units	HF: 25 mm (1 in.) LF: 130 mm (5.25 in.)
Amplifier requirements	10-100 W
Sensitivity	89 dB (2.83 V/1 m)
Impedance	6Ω
Operating temperature range	-40° C to 70° C (-40° F to 158° F)
Certification	IP65
Dimensions	H262 x W197 x D189 mm (10.3 x 7.75 x 7.4 in.)/piece
Product weight	2.85 kg (6.28 lbs.)/piece



LOGISTIC SPECIFICATION		
Packaging dimensions	H330 x W541 x D257 mm (13 x 21.3 x 10.1 in.)/piece	
Gross weight	6.3 kg (13.9 lbs.)/piece	
Warranty period	5 years	
Finishes	a. Black	b. White
Item no.	SP3675BA	SP3675AA
UPC	637203031090	637203028793

## Accessories

### Steel Rough-in Frames

For in-wall and in-ceiling speakers



MSRP	
RIF100S	-/pair
RIF100R	-/pair
RIF130S	-/pair
RIF130R	-/pair
RIF160L	-/pair
RIF160S	-/pair
RIF160R	-/pair
RIF200L	-/pair
RIF200S	-/pair
RIF200R	-/pair
RIF4100L	-/pair
RIF3160L	-/pair
RIF5160L	-/pair

#### PRODUCT SPECIFICATION

Dimensions		
RIF100S & RIF100R	H149 x W590 mm (5.9 x 23.2 in.)	/piece
RIF130S & RIF130R	H187 x W590 mm (7.4 x 23.2 in.)	/piece
RIF130S & RIF130R	H187 x W590 mm (7.4 x 23.2 in.)	/piece
RIF160L	H320 x W590 mm (13 x 23.2 in.)	/piece
RIF160S & RIF160R	H240 x W590 mm (9.5 x 23.2 in.)	/piece
RIF200L	H386 x W590 mm (15.2 x 23.2 in.)	/piece
RIF200S & RIF200R	H280 x W590 mm (11 x 23.2 in.)	/piece
RIF4100L	H530 x W571 mm (20.9 x 22.5 in.)	/piece
RIF3160L	H712 x W590 mm (28 x 23.2 in.)	/piece
RIF5160L	H1102 x W590 mm (43.4 x 23.2 in.)	/piece

### Steel Rear Enclosures

For in-wall and in-ceiling speakers



MSRP	
RNC100R	-/piece
RNC130R	-/piece
RNC160R	-/piece
RNC200R	-/piece
RNC130S	-/piece
RNC160S	-/piece
RNC200S	-/piece
RNC100S	-/piece
RNC200L	-/piece
RNC160L	-/piece
Ci520 CAN SGL	-/piece

#### PRODUCT SPECIFICATION

Dimensions		
RNC100R	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)	/piece
RNC130R	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)	/piece
RNC160R	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)	/piece
RNC200R	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)	/piece
RNC130S	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)	/piece
RNC160S	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)	/piece
RNC200S	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)	/piece
RNC100S	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)	/piece
RNC200L	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)	/piece
RNC160L	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)	/piece

# Listen and believe

Explore more



## **GP Acoustics GmbH**

Nordhofstraße 2

D - 45127 Essen

Phone: +49 (0)201-17039-0

Postal Address Netherlands:

GP Acoustics GmbH, Postbus 213, 5240AE, Rosmalen

E-Mail: [info.nl@kef.com](mailto:info.nl@kef.com)

NB Some of the information in this price list may not have been updated due to product changes which may have occurred since it was printed/published. The manufacturer reserves the right to make changes at any time, without notice, to prices, colour, materials, specifications and models.

